凤凰冷压端头

PHOENIX CABLE ACCESSORIES

2021

乐清凤凰线头有限公司

YUEQING PHOENIX TERMINAL CO., LTD.

凤凰冷压端头

PHOENIX COLD PRESS TERMINAL

公司简介

Company Profile

乐清凤凰线头有限公司，冷压端头和接头，是参照美国、日本、德国等标准生产。广泛应用于机械、纺织、电力、汽车、铁路、造船、航天航空、轻工、家电、计算机、自动化装置成套设备等行业。

凤凰端头和接头使用进口插套组合机、焊接机等设备。T2紫铜料表面镀锡，保证了可靠的导电率。端头尾部内孔有螺纹线，进口绝缘套为硬质、不断裂、不回弹。

公司本着“以科技求发展、以质量求生存”的原则，坚持“用户第一、质量第一、服务第一、信誉第一”的宗旨，并将这一思路始终贯彻产、供、销等整个企业运行过程之中。

公司本着“为民族电力事业的繁荣而奋斗”为企业宗旨，以“营造安全空间，构筑现代生活”为使命，热忱欢迎海内外客商前业洽谈合作，共同致力电力工业的繁荣和发展。

Yueqing Phoenix Terminal Co., Ltd., Cold pressure terminal and tie-in is manufactured according to the standard of American, Japan and Germany. They are widely used in mechanism, textile, electric power, auto, railway, watercraft, space flight, aviation, light industry, home electric appliance, computer, and automatic whole set equipment.

Phoenix terminal and tie-in are adopted exported insert & muff assorted machine and welding machine. For T2 bronze material plated with tin, it ensures the conduct electricity rate. The hole in tail of the terminal has screw wire. Exported insulated cover is hard, not flexible and has no rupture.

Based on the principle of “development based on science, survival based on quality” and insisted on the guideline of “consumer first, quality first, service first, credit first”, the company carries on the idea in production, supply and market.

Based on the enterprise principle of “make great effort to the national electric power career”, and the target of “build up safe space, and modern life”, we heartily welcome domestic and oversea consumers to our company and try our best to develop and flourish the electric power industry .



统一社会信用代码

91330382091691985C (1/1)

营业执照

(副本)

名　　称　乐清凤凰线头有限公司

类　　型　有限责任公司（自然人投资或控股）

法定代表人　王禹铮

经营范围　电缆附件、电线电缆、电气化铁路配件、塑料件、橡胶件、高低压电器成套设备、电缆分支箱、电表箱、电工器材、电器元件、智能电子元器件、母线架桥、电力施工工具、工控系统元件、五金件研发、制造、销售、技术服务咨询；有色金属机械加工、销售（不含冶炼、铸造、电镀）；货物进出口、技术进出口。（依法须经批准的项目，经相关部门批准后方可开展经营活动）

注册资本　壹仟万元整

成立日期　2014年02月10日

营业期限　2014年02月10日 至 长期

住　　所　浙江省温州市乐清市柳市镇长征路70-88号

登记机关　乐清市市场监督管理局

2019年11月13日

国家企业信用信息公示系统网址:http://www.gsxt.gov.cn　市场主体应当于每年1月1日至6月30日通过国家企业信用信息公示系统报送公示年度报告。　国家市场监督管理总局监制





证书编号：3852OQ2416R0S
证书有效期从：2020-12-24至2023-12-23
本制证书有效期至：2021-12-23
版本号：A1

质量管理体系认证证书

兹证明

乐清凤凰线头有限公司
统一社会信用代码：91330382091691985C

注册地址：浙江省温州市乐清市柳市镇长虹路78-88号
经营地址：浙江省温州市乐清市柳市镇长虹路78-88号

质量管理体系符合如下标准

GB/T 19001-2016/ISO 9001:2015

证书覆盖范围

电气用铜接线端子的制造和服务

本证书在国家规定的行政许可、资质、强制性产品认证有效期内并应于证书有效期前，按规定执行监督审核并经审核合格的情况下保持有效。本证书可在本机构网站 http://www.nsyglobal.com 和中国国家认监委官方网站 http://www.cnca.gov.cn 查询。

新标元认证（上海）有限公司



Certificate No.: 3852OQ2416R0S
Valid from: 2020-12-24 until 2023-12-23
Re-certification audit due before: 2021-12-23
Ver.: A1

Quality Management System Certificate

This is to certify that

YUEQING PHOENIX WIRES CO., LTD.
Uniform social credit code: 91330382091691985C
Registered address: No. 70-88, Changzheng Road, Liushi Town, Yueqing, Zhejiang
Business address: No. 70-88, Changzheng Road, Liushi Town, Yueqing, Zhejiang

Quality management system as per

GB/T 19001-2016/ISO 9001:2015

for the following scope

Manufacture and service of electrical copper terminal blocks

This certificate shall be valid within the validity period of the administrative license, qualification and mandatory product certification stipulated by the State and shall be valid if it is subject to the supervision and examination and passed the examination. To verify that, this certificate is current please refer to http://www.nsyglobal.com and CNCA website at http://www.cnca.gov.cn

NSY Certification (Shanghai) Co.,Ltd.



ISET S.r.l.

CERTIFICATE

Certificat - Certificado- Сертификат - Zertifikat - 证书


1) **APPLICANT:** (who finally puts the product on the market)
Yueqing Phoenix terminal Co., Ltd
No. 139, Changzheng road, Liushi town, Yueqing, Wenzhou, Zhejiang province
2) **CERTIFICATE NO.:** ISETEC001420190515
FILE REFERENCE: ISTXD1904125584001SR
3) **ISET MARK:**
4) **CAUTION ABOUT CE MARKING** (Instruction for the Applicant who puts the product on the EU market):
The label of the CE Marking on the left side should be not less than 5mm height. CE Marking and EC Declaration of Conformity are duties for the manufacturer or Its applicant who puts the product on the market. This one is responsible to start the CE marking and certification procedure as required by the legislation in force. Only for the products which are compulsorily included into specific Directives or Regulations will be necessary to appoint a Notified Body.
5) **TYPE OF PRODUCT:** Cold Pressed Ends
MODELS: OT 0.5 mm²-300mm², SV 0.5 mm² ~6 mm², JV 0.5 mm² ~6 mm², JC 0.5 mm² ~150 mm², EN 0.5 mm² ~6 mm², FDD 0.5 mm² ~6 mm², MDD 0.5 mm² ~6 mm², BV 0.5 mm² ~6 mm², DBV 0.5 mm² ~6 mm², PTV 0.5 mm² ~6 mm², SNBD.5 mm² ~22mm², RNBD.5 mm² ~200 mm², OT-S 5 mm² ~300mm², UT 0.5 mm² ~mm², IT 0.5 mm² ~70 mm², C45 1.5 mm² ~70 mm², V 1 mm² ~630 mm², BNT 0.5 mm² ~6 mm²
6) **LIST OF DIRECTIVES / REGULATIONS STANDARDS** (as declared by the manufacturer itself)
Low Voltage Directive 2014/35/EU, EN 60998-1:2004, EN 60998-2-1:2004
7) **NOTE:** The applicant is aware about the contents and information included in the ModCOM44.06 Regulation for this type of Certificate that is considered totally accepted. The latest revision of the Regulation is available and can be downloaded from the website www.iset-italia.eu. This document is not referred to any evaluation that could be considered as included in the scope of the activities covered by the standard BS EN ISO/IEC 17065:2012 or European Regulation 765/2008.
8) **REMARK:** Certificate is issued on voluntary application from the Client and it gives to the applicant the right to use and affix the ISET Mark (at point 3) on their products, even if it doesn't imply any assessment on the safety and compliance of the product. ISET declares that the only scope of the assessment is to verify the existence of the declaration issued by the manufacturer or an applicant under its own responsibilities.
9) **DATE OF ISSUE:** 15/05/2019 **EXPIRY DATE:** 14/05/2022
10) **SIGNATURE:** Miriam Camplone
(On behalf of the Legal representative)

ISET S.R.L.

This document is property of ISET Srl and any kind of reproduction is to be considered strictly forbidden.





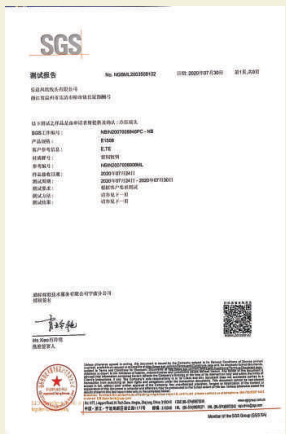



凤凰冷压端头
PHOENIX COLD PRESS TERMINAL



1-2 圆形预绝缘端头 ROURD SHAPE NAKED TERMINAL
快速接合连接器 QUICK SPLICE CONNECTORS



3 叉形预绝缘端头 FORK SHAPE PREINSULATION TERMINAL



4 片形预绝缘端头 PLATE SHAPE PRE-INSUATION TERMINAL
针形预绝缘端头 NEEDIE SHAPE TERMINAL



5 公预绝缘端头 MALE PRE-INSULATIONTERMINAL
公母钩形绝缘端头 HOCK SHAPE PRE-INSULATIONTERMINAL



6 全绝缘套端头 FULL PRE-INSULATION TERMINAL
母预绝缘端头 FEMALE PER-INSULATION TERMINAL



7 子弹形公预绝缘端头 BULLET SHAPE MALE PRE-INSULATION TERMINAL
子弹形母全绝缘端头 BULLET SHAPE FEMALE FULL INSULATION TERMINAL



8-9 管形裸端头 PIPE BARE TERMINAL



10 管形预绝缘端头 PIPE BARE TERMINAL



11 双线插入式管形预绝缘端头 DOUBLE WIRE INSERT TYPE RING FREFAB INSULATED TERMINAL



11 IT 双层扁冷压端头 IT DOUBLE TERMINAL



12 非绝缘对接&并接连接器 Non-Insulated Butt & Paralle Connectors



12 乙烯基&尼龙-绝缘对接连接器 Vinyl & Nylon-Insulated Butt Connectors
乙烯基-绝缘并接连接器 Vinyl-Insulated Paralle Connectors



13 圆形裸端头 ROUND SHAPE NAKED TERMINAL



14-15 圆形裸端头 ROUND SHAPE NAKED TERMINAL



16 叉形裸端头 FORK SHAPE NAKED TERMINAL



17 片形裸端头 PLATE SHAPE NAKED TERMINAL
针形裸端头 NEEDLE SHAPE NAKED TERMINAL



18 圆形冷压端头 CIRCULAR COLD PRESS TERMINAL

Contents | 目 录


19-20 圆形冷压端头 CIRCULAR COLD PRESS TERMINAL


21 圆形冷压端头 CIRCULAR COLD PRESS TERMINAL



22 叉形冷压端头 FORK COLD PRESS TERMINAL


23 圆形船用裸端头 BARE CIRCULAR TERMINAL FOR WATERCRAFT


24 针形冷压端头 PIN COLD TERMINAL
C45扦片焊缝 C45 INSERTING SLICE WELDING SEAM


25 母对接端头（尼龙） FEMALE PRE-INSULATION TERMINAL
公对接端头（尼龙） MALE PRE-INSULATIONTERMINAL


25 旗形端头（尼龙） FLAG SHAPE TERMINAL


26 子弹形公预绝缘端头（尼龙） BULLET SHAPE MALE PRE-INSULATION TERMINAL
子弹形母全绝缘端头（尼龙） BULLET SHAPE FEMALE FULL INSULATION TERMINAL


26 长形全绝缘中间接头（热缩） PIN COLD TERMINAL


27 圆形预绝缘端头（热缩） ROURD SHAPE NAKED TERMINAL


28 叉形预绝缘端头（热缩） FORK SHAPE PREINSULATION TERMINAL


29 旋上式线螺母接头(内置弹簧的翅膀式) SCREW-ON WIRE NUT CONNECTORS (WING TYPE WITH SPRING INSERT)


29 冷压端子护套 COLD PRESS TERMINAL SHEATH


31 OT 铜开口接线鼻 OT COPPER OPERN CONNECTING NOSE/GT-1
DTL 系列铜铝接线端子 DTL COPPER-ALUMINIUM CONNECTING TERMINALS


32 DT 系列铜接线端子（堵油型） DT COPPER CONNECTING TERMINALS
DT 系列铝接线端子（堵油型） DT ALUMINIUM CONNECTING TERMINALS



33 JG铜接线端头 JG COPPER CONNECTION TERMINAL


33 SC(JGK) SC(JGA)引进铜接线端头 SC(JGK) SC(JGA) IMPORT COPPER TERMINAL

圆形预绝缘端头
ROURD SHAPE NAKED TERMINAL

绝缘材料：绝缘　PVC
绝缘颜色
22-16 A.W.G:红色　　16-14 A.W.G:蓝色
端子材料：紫铜
INSULATON MATERIAL:VINYL
INSULATION COLOR
22-16 A.W.G:RED　16-14 A.W.G:BLUE
TERMINAL MATERIAL:COPPER






线范围 WIRE RANGE A.W.G. mm²	项　目 ITEM N O.	饰钮尺寸 STUD SIZE		尺寸 DIMENSION						颜色	包装
		Φ±0.3		B±0.3	L±0.5	E±0.3	D±0.3	C±0.3	T±0.03		
22-16 A.W.G. 0.5-1.5 mm²	RV1.25-3.2	#4	3.2	5.5	18.0	10.5	4.0	1.7	0.75	红	500PCS
	RV1.25-3.7	#6	3.7	5.5	18.0						
	RV1.25-4	#8	4.2	6.6	20.0						
	RVL1.25-4	#8	4.2	8.0	21.5						
	RV1.25-5	#10	5.2	8.0	21.0						
	RV1.25-6	1/4	6.2	11.6	27.3						
	RV1.25-8	5/16	8.2	11.6	27.3						
	RV1.25-10	3/8	10.5	13.6	31.0						
	RV1.25-12	1/2	12.5	19.2	36.0						
	RV1.25-16	5/8	16.5	24.0	39.5						
16-14 A.W.G. 1.5-2.5 mm²	RV2-3.2	#4	3.2	6.6	18.0	10.5	4.5	2.3	0.8	蓝	
	RV2-3.7	#4	3.7	6.6	18.5						
	RV2-4	#8	4.2	6.6	20.0						
	RVL2-4	#8	4.2	8.5	22.0						
	RV2-5	#10	5.2	8.5	22.5						
	RVL2-5	#10	5.2	9.5	22.5						
	RV2-6	1/4	6.2	12.0	27.5						
	RV2-8	5/16	8.2	12.0	27.5						
	RV2-10	3/8	10.5	13.6	31.5						
	RV2-12	1/2	12.5	19.2	36.0						
	RV2-16	5/8	16.5	24.0	39. 5						

圆形预绝缘端头
ROURD SHAPE NAKED TERMINAL






绝缘材料：绝缘　PVC
绝缘颜色
16-14 A.W.G:蓝色　14-12A.W.G:黑色　12-10 A.W.G:黄色
端子材料：紫铜
MAXIMUM ELECTRIC CURRENT:
INSULATON MATERIAL:VINYL
INSULATION COLOR
16-14 A.W.G:BLUE 14-12A.W.G:BLACK 12-10 A.W.G:YELLOW
TERMINAL MATERIAL:COPPER

线范围 WIRE RANGE A.W.G. mm²	项　目 ITEM N O.	饰钮尺寸 STUD SIZE		尺寸 DIMENSION						颜色	包装
		Φ±0.3		B±0.3	L±0.5	E±0.3	D±0.3	C±0.3	T±0.03		
14-12 A.W.G. 2.5-4 mm²	RV3.5-4	#8	4.2	8.0	25.0	13.5	6.3	2.9	1.0	黑	250PCS
	RV3.5-5	#10	5.2	8.0	25.0						
	RVL3.5-5	#10	5.2	12.0	28.5						
	RV3.5-6	1/4	6.2	12.0	28.5						
	RV3.5-8	5/16	8.2	15.0	34.0						
12-10 A.W.G. 4-6 mm²	RVS5.5-4	#8	4.2	7.2	23.0	13.5	6.3	3.5	1.0	黄	
	RVL5.5-4	#8	4.2	9.5	26.6						
	RV5.5-5	#10	5.2	9.5	26.6						
	RV5.5-6	1/4	6.2	12.0	29.5						
	RV5.5-8	5/16	8.2	15.0	34.0						
	RV5.5-10	3/8	10.5	15.0	34.0						
	RV5.5-12	1/2	12.5	19.2	39.0						

快速接合连接器
QUICK SPLICE CONNECTORS

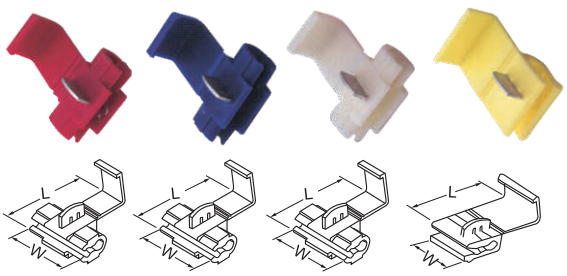


端子材料：PVC
端子材料：黄铜
TERMINAL MATERIAL:PVC
TERMINAL MATERIAL:BRASS

线范围 WIRE RANGE A.W.G. mm²	项　目 ITEM N O.	W 英寸 inch mm	L 英寸 inch mm	颜色 COLOR
22-18 A.W.G. 0.5-1.0 mm²	878100	.787 20.0	1.063 27.0	红 RED
18-14A.W.G. 0.75-2.5 mm²	878101	.787 20.0	1.063 27.0	蓝 BLUE
18-14A.W.G. 0.75-2.5 mm²	878101	.787 20.0	1.063 27.0	白 WHITE
12-10A.W.G. 4-6 mm²	878201	.807 20.5	1.358 34.5	黄 YELLOW

叉形预绝缘端头
FORK SHAPE PREINSULATION TERMINAL

绝缘材料：绝缘　PVC
绝缘颜色
22-16 A.W.G:红色　16-14 A.W.G:蓝色
14-12A.W.G:黑色　12-10 A.W.G:黄色
端子材料：紫铜
INSULATON MATERIAL:VINYL
INSULATION COLOR
22-16 A.W.G:RED　16-14 A.W.G:BLUE
14-12A.W.G:BLACK　12-10 A.W.G:YELLOW
TERMINAL MATERIAL:COPPER






线范围 WIRE RANGE A.W.G. mm²	项　目 ITEM N O.	饰钮尺寸 STUD SIZE		尺寸 DIMENSION						颜色	包装
		Φ±0.3		B±0.3	L±0.5	E±0.3	D±0.3	C±0.3	T±0.03		
22-16 A.W.G. 0.5-1.5 mm²	SV1.25-3.2	#4	3.2	5.7	21.5	10.5	4.0	1.7	0.75	红	500PCS
	SV1.25-3.7	#6	3.7	5.7							
	SV1.25-4	#8	4.2	6.4							
	SVM1.25-4	#8	4.2	7.2							
	SV1.25-5	#10	5.2	8.1							
	SV1.25-6	1/4	6.2	9.5							
16-14 A.W.G. 1.5-2.5 mm²	SV2-3.2	#4	3.2	5.7	21.5	10.5	4.5	2.3	0.8	蓝	
	SV2-3.7	#6	3.7	5.7							
	SV2-4	#8	4.2	6.4							
	SVM2-4	#8	4.2	7.2							
	SV2-5	#10	5.2	8.0							
	SVL2-5	#10	5.2	9.3							
	SV2-6	1/4	6.2	9.3							
14-12 A.W.G. 2.5-4 mm²	SV3.5-4	#8	4.2	8.0	25.5	13.5	6.3	3.0	1.0	黑	250PCS
	SV3.5-5	#10	5.2	8.0							
	SV3.5-6	1/4	6.2	12.0							
12-10 A.W.G. 4-6 mm²	SV5.5-4	#8	4.2	8.3	25.5	13.5	6.3	3.5	1.0	黄	
	SV5.5-5	#10	5.2	9.0							
	SVS5.5-6	1/4	6.2	9.0							
	SVL5.5-6	1/4	6.2	12.0	32.0						
	SV5.5-8	5/16	8.2	14.0	31.0						

片形预绝缘端头
PLATE SHAPE PRE-INSULATION TERMINAL






绝缘材料：绝缘　PVC
绝缘颜色
12-10 A.W.G:黄色　22-16A.W.G:红色　16-14 A.W.G:蓝色
端子材料：紫铜
INSULATON MATERIAL:VINYL
INSULATION COLOR
12-10 A.W.G:YELLOW　22-16A.W.G:RED　16-14 A.W.G:BLUE
TERMINAL MATERIAL:COPPER

线范围 WIRE RANGE A.W.G. mm²	项　目 ITEM NO.	尺寸 DIMENSION						颜色	包装
		B±0.3	L±0.5	E±0.3	D±0.3	C±0.3	T±0.03		
22-16 A.W.G. 0.5-1.5 mm²	DBV1.25-10	2.3	20.5	10.5	4.0	1.7	0.75	红	500PCS
	DBV1.25-14	2.3	24.5						
	DBV1.25-18	2.4	28.5						
16-14 A.W.G. 1.5-2.5 mm²	DBV2-10	2.4	20.0	10.5	4.5	2.3	0.8	蓝	
	DBV2-14	2.4	24.5						
	DBV2-18	2.4	28.5						
12-10 A.W.G. 4-6 mm²	DBV5.5-10	2.8	24.5	13.5	6.3	3.5	1.0	黄	250PCS
	DBV5.5×4.5×14	4.5	27.5						
	DBV5.5-18	4.5	31.5						

针形预绝缘端头
NEEDLE SHAPE TERMINAL






绝缘材料：绝缘　PVC
绝缘颜色
12-10 A.W.G:黄色　22-16A.W.G:红色　16-14 A.W.G:蓝色
端子材料：紫铜
INSULATION COLOR:VINYL
12-10 A.W.G:YELLOW　22-16A.W.G:RED　16-14 A.W.G:BLUE
TERMINAL MATERIAL:COPPER

线范围 WIRE RANGE A.W.G. mm²	项　目 ITEM NO.	尺寸 DIMENSION						颜色	包装
		B±0.3	L±0.5	E±0.3	D±0.3	C±0.3	T±0.03		
22-16 A.W.G. 0.5-1.5 mm²	PTV1.25-10	2.0	20.5	10.5	4.0	1.7	0.75	红	500PCS
	PTV1.25-13	2.0	23.5						
	PTV1.25-18	2.0	29.5						
16-14 A.W.G. 1.5-2.5 mm²	PTV2-10	2.0	20.5	10.5	4.5	2.3	0.8	蓝	
	PTV2-13	2.0	23.5						
	PTV2-18	2.0	30.5						
12-10 A.W.G. 4-6 mm²	PTV5.5-13	2.8	28.0	13.5	6.3	3.5	1.0	黄	250PCS
	PTV5.5-18	2.8	35.0						

公预绝缘端头
MALE PRE-INSULATIONTERMINAL

绝缘材料：绝缘　PVC
绝缘颜色
22-16 A.W.G:红色　16-14A.W.G:蓝色　12-10 A.W.G:黄色
端子材料：黄铜
22-16 A.W.G:C=1.7mm　16-14A.W.G:C=2.3mm　12-10A.W.G:C=3.4mm
INSULATION COLOR:VINYL　TERMINA AMTERIAL.BRASS
INSULATION COLOR:
22-16 A.W.G:RED　16-14A.W.G:BLUE　12-10 A.W.G:YELLOW
TERMINAL MATERIAL:COPPER
22-16 A.W.G:C=1.7mm　16-14A.W.G:C=2.3mm　12-10A.W.G:C=3.4mm






线范围 WIRE RANGE A.W.G. mm²	项　目 ITEM NO.	头部尺寸	尺寸 DIMENSION					包装
			B±0.3	L±0.5	E±0.3	D±0.3	T±0.03	
22-16 A.W.G. 0.5-1.5 mm²	MDD1.25-110(5)	0.5×2.8	2.8	18.5	10.5	4.0	0.5	500PCS
	MDD1.25-187(5)	0.5×4.75	4.8	19.0	10.5	4.0	0.5	
	MDD1.25-250(8)	0.8×6.35	6.35	21.0	10.5	4.0	0.5	
16-14 A.W.G. 1.5-2.5 mm²	MDD2-110(5)	0.5×2.8	2.8	18.5	10.5	4.5	0.5	
	MDD2-187(5)	0.5×4.75	4.8	19.0	10.0	4.5	0.4	
	MDD2-250(8)	0.8×6.35	6.35	21.0	10.0	4.5	0.4	
12-10 A.W.G. 4-6 mm²	MDD5.5-250(8)	0.8×6.35	6.35	24.0	13.0	5.5	0.4	250PCS

公母钩形绝缘端头
HOCK SHAPE PRE-INSULATIONTERMINAL

绝缘材料：绝缘　PVC
绝缘颜色
22-16 A.W.G:红色　16-14A.W.G:蓝色　12-10 A.W.G:黄色
端子材料：黄铜
22-16 A.W.G:C=1.7mm　16-14A.W.G:C=2.3mm　12-10A.W.G:C=3.4mm
INSULATION COLOR:VINYL　TERMINA AMTERIAL.BRASS
INSULATION COLOR:
22-16 A.W.G:RED　16-14A.W.G:BLUE　12-10 A.W.G:YELLOW
TERMINAL MATERIAL:COPPER
22-16 A.W.G:C=1.7mm　16-14A.W.G:C=2.3mm　12-10A.W.G:C=3.4mm






线范围 WIRE RANGE A.W.G. mm²	项　目 ITEM NO.	头部尺寸	尺寸 DIMENSION							包装
			B±0.3	B1±0.3	F±0.3	F1±0.3	L±0.5	E±0.3	D±0.3	T±0.03	
22-16 A.W.G. 0.5-1.5 mm²	PBDD1.25-250	0.8×6.35	6.6	6.35	8.0	8.2	22.0	10.0	4.0	0.4	500PCS
16-14 A.W.G. 1.5-2.5 mm²	PBDD2-250	0.8×6.35	6.6	6.35	8.0	8.2	22.0	10.0	4.5	0.4	
12-10 A.W.G. 4-6 mm²	PBDD5.5-250	0.8×6.35	6.6	6.35	8.0	8.2	24.0	13.0	5.5	0.4	

母预绝缘端头
FEMALE PRE-INSULATION TERMINAL






绝缘材料：绝缘　PVC
绝缘颜色
22-16 A.W.G:红色　16-14A.W.G:蓝色　12-10 A.W.G:黄色
端子材料：黄铜
22-16 A.W.G:C=1.7mm　16-14A.W.G:C=2.3mm　12-10A.W.G:C=3.4mm
INSULATION COLOR:VINYL　TERMINA AMTERIAL.BRASS
INSULATION COLOR:
22-16 A.W.G:RED 16-14A.W.G:BLUE 12-10 A.W.G:YELLOW
TERMINAL MATERIAL:COPPER
22-16 A.W.G:C=1.7mm　16-14A.W.G:C=2.3mm　12-10A.W.G:C=3.4mm

线范围 WIRE RANGE A.W.G. mm²	项　目 ITEM NO.	头部尺寸	尺寸 DIMENSION					包装
			B±0.3	L±0.5	E±0.3	D±0.3	T±0.03	
22-16 A.W.G. 0.5-1.5 mm²	FDD1.25-110(5)	0.5×2.8	3.2	19.6	11.0	4.0	0.3	500PCS
	FDD1.25-187(5)	0.5×4.75	5.0	20.0	11.0	4.0	0.4	
	FDD1.25-250(8)	0.8×6.35	6.6	21.5	11.0	4.0	0.4	
16-14 A.W.G. 1.5-2.5 mm²	FDD2-110(5)	0.5×2.8	3.2	19.6	11.0	4.5	0.3	
	FDD2-187(5)	0.5×4.75	5.0	20.0	11.0	4.5	0.4	
	FDD2-250(8)	0.8×6.35	6.6	21.5	11.0	4.5	0.4	
12-10A.W.G. 4-6 mm²	FDD5.5-250(8)	0.8×6.35	6.6	23.5	13.0	6.3	0.4	250PCS

全绝缘套端头
FULL PRE-INSULATION TERMINAL






绝缘材料：绝缘　PVC
端子材料：黄铜
绝缘颜色
22-16 A.W.G:红色　16-14A.W.G:蓝色　12-10 A.W.G:黄色
端子管标识符:
22-16 A.W.G:C=1.7mm　16-14A.W.G:C=2.3mm　12-10A.W.G:C=3.4mm
INSULATON MATERIAL:VINYL　TERMINAL MATERIAL:BRASS
INSULATION COLOR:
22-16 A.W.G:RED 16-14A.W.G:BLUE 12-10 A.W.G:YELLOW
TERMINAL BARREL I.D:
22-16 A.W.G:C=1.7mm　16-14A.W.G:C=2.3mm　12-10A.W.G:C=3.4mm

线范围 WIRE RANGE A.W.G. mm²	项　目 ITEM NO.	头部尺寸	尺寸 DIMENSION					包装
			B±0.3	L±0.5	E±0.3	D±0.3	T±0.03	
22-16 A.W.G. 0.5-1.5 mm²	FDFD1.25-110(5)	0.5×2.85	3.0	19	10.5	4.0	0.3	500PCS
	FDFD1.25-187(5)	0.5×4.75	5.0	20.5	10.5	4.0	0.3	
	FDFD1.25-250(8)	0.8×6.35	6.6	23	10.5	4.0	0.4	
16-14 A.W.G. 1.5-2.5 mm²	FDFD2-110(5)	0.5×2.85	3.0	19	10.5	4.5	0.3	
	FDFD2-187(5)	0.5×4.75	5.0	20.5	10.5	4.5	0.3	
	FDFD2-250(8)	0.8×6.35	6.6	23	10.5	4.5	0.4	
12-10 A.W.G. 4-6 mm²	FDFD5.5-250(8)	0.8×6.35	6.6	26.2	14.5	6.3	0.4	

子弹形公预绝缘端头
BULLET SHAPE MALE PRE-INSULATION TERMINAL






绝缘材料：绝缘　PVC
绝缘颜色
22-16 A.W.G:红色　16-14A.W.G:蓝色　12-10 A.W.G:黄色
端子材料：黄铜
22-16 A.W.G:C=1.7mm　16-14A.W.G:C=2.3mm　12-10A.W.G:C=3.4mm
INSULATON MATERIAL:VINYL　TERMINAL AMTERIAL:BRASS
INSULATION COLOR:
22-16 A.W.G:RED　16-14A.W.G:BLUE　12-10 A.W.G:YELLOW
TERMINAL MATERIAL:COPPER
22-16 A.W.G:C=1.7mm　16-14A.W.G:C=2.3mm　12-10A.W.G:C=3.4mm

线范围 WIRE RANGE A.W.G. mm^2	项　目 ITEM NO.	尺寸 DIMENSION					包装
		B±0.3	L±0.5	E±0.3	D±0.3	T±0.03	
22-16A.W.G. 0.5-1.5 mm^2	MPD1.25-156	4.0	21.0	10.5	4.0	0.4	500PCS
16-14A.W.G. 1.5-2.5 mm^2	MPD2-156	4.0	22.0	10.5	4.5	0.4	
12-10A.W.G. 4-6 mm^2	MPD5.5-195	5.0	23.5	13.8	6.0	0.4	

子弹形母全绝缘端头
BULLET SHAPE FEMALE FULL INSULATION TERMINAL






绝缘材料：绝缘　PVC　　端子材料：黄铜
绝缘颜色
22-16 A.W.G:红色　16-14A.W.G:蓝色　12-10 A.W.G:黄色
端子管标识符:
22-16 A.W.G:C=1.7mm　16-14A.W.G:C=2.3mm　12-10A.W.G:C=3.4mm
INSULATON MATERIAL:VINYL　TERMINAL MATERIAL:BRASS
INSULATION COLOR:
22-16 A.W.G:RED　16-14A.W.G:BLUE　12-10 A.W.G:YELLOW
TERMINAL BARREL I.D:
22-16 A.W.G:C=1.7mm　16-14A.W.G:C=2.3mm　12-10A.W.G:C=3.4mm

线范围 WIRE RANGE A.W.G. mm^2	项　目 ITEM NO.	尺寸 DIMENSION					包装
		B±0.3	L±0.5	E±0.3	D±0.3	T±0.03	
22-16 A.W.G. 0.5-1.5 mm^2	FRD1.25-156	3.9	23.5	10.5	3.8	0.4	500PCS
16-14 A.W.G. 1.5-2.5 mm^2	FRD2-156	3.9	24.5	10.5	4.7	0.4	
12-10 A.W.G. 4-6 mm^2	FRD5.5-195	4.9	25.0	12.5	6.2	0.4	

管形裸端头
PIPE BARE TERMINAL






端子材料：镀银紫铜管
TERMINAL MATERIAL : BRAZEN PLATING TIN

电线范围 WIRE RANGE A.W.G mm²	型号 ITEMNO	尺寸 DIMENSION				使用压接工具型号 USING PRESSING AND CONNECTING TOOL TYPE	包装
		L±0.5	D±0.3	C±0.3	W±0.3		
22 A.W.G. 0.5 mm²	GT0508	8.0	1.4	1.1	1.7	FXT2000L 使用0.5钳口	2000PCS
	GT0510	10.0					
	GT0512	12.0					
20 A.W.G. 0.75 mm²	GT7508	8.0	1.6	1.3	1.9	FXT2000L 使用0.75钳口	
	GT7510	10.0					
	GT7512	12.0					
18 A.W.G. 1.0 mm²	GT1008	8.0	1.8	1.5	2.2	FXT2000L 使用1.0钳口	
	GT1010	10.0					
	GT1012	12.0					
16 A.W.G. 1.5 mm²	GT1508	8.0	2.0	1.7	2.5	FXT2000L 使用1.5钳口	
	GT1510	10.0					
	GT1512	12.0					
	GT1518	18.0					
14 A.W.G. 2.5 mm²	GT2508	8.0	2.5	2.2	3.3	FXT2000L 使用2.5钳口	
	GT2510	10.0					
	GT2512	12.0					
	GT2518	18.0					
12 A.W.G. 4 mm²	GT4009	9.0	3.4	3.0	3.9	FXT2000L 使用4.0钳口	1000PCS
	GT4012	12.0					
	GT4018	18.0					
10 A.W.G. 6 mm²	GT6010	10.0	4.0	3.6	4.7	FXT2000M 使用6.0钳口	
	GT6012	12.0					
	GT6015	15.0					
	GT6018	18.0					
8 A.W.G. 10 mm²S	GT8-12	12.0	4.9	4.5	5.5	FXT2000M 使用10钳口	
	GT8-18	18.0					
8 A.W.G. 10 mm²	GT10-12	12.0	5.6	5.2	6.2	FXT2000M 使用10钳口	
	GT10-15	15.0					
	GT10-18	18.0					
	GT10-25	25.0					
6 A.W.G. 16 mm²	GT16-12	12.0	6.4	6.0	7.4	FXT2000M 使用16钳口	
	GT16-15	15.0					
	GT16-18	18.0					
	GT16-25	25.0					

管形裸端头
PIPE BARE TERMINAL






端子材料：镀银紫铜管
TERMINAL MATERIAL : BRAZEN PLATING TIN

电线范围 WIRE RANGE A.W.G mm²	型号 ITEMNO	尺寸 DIMENSION				使用压接工具型号 USING PRESSING AND CONNECTING TOOL TYPE	包装
		L±0.5	D±0.3	C±0.3	W±0.3		
4 A.W.G. 25 mm²	GT25-12	12.0	7.8	7.4	9.1	FXT2000N 使用25钳口	500PCS
	GT25-16	16.0					
	GT25-18	18.0					
	GT25-25	25.0					
2 A.W.G. 35 mm²	GT35-16	16.0	8.7	8.3	10.2	FXT2000N 使用35钳口	
	GT35-25	25.0					
1/0 A.W.G. 50 mm²	GT50-18	18.0	11.0	10.4	12.7	FXT2000P 使用50钳口	
	GT50-25	25.0					
2/0 A.W.G. 70 mm²	GT70-18	18.0	12.5	11.9	15.8	FXT2000L 使用50钳口	
	GT70-25	25.0					200PCS
3/.A.W.G. 95 mm²	GT95-30	30.0	15.6	14.8	17.3		100PCS
4/0 A.W.G. 120 mm²	GT120-32	32.0	17.7	16.7	20.2		
150/300A.W.G. 150 mm²	GT150-40	40.0	20.6	19.6	23.0		

管形预绝缘端头
PIPE BARE TERMINAL






端头材质：镀锡紫铜管
绝缘套材质：尼龙　PVC
CONNECTOR MATERIAL:COPPER TUBE
INSULATION MATERIAL:NYLON

电线范围 WIRE RANGE A.W.G mm²	型号 ITEMNO	尺寸 DIMENSION					法国颜色 德国颜色 COLOR GERMANY COLOR FRANCE	使用压接工具型号 USING PRESSING AND CONNECTING TOOL TYPE	包装
		F±0.2	L±0.5	W±0.2	D±0.2	C±0.2			
24A.W.G. 0.3 mm²	E0306	6.0	10.5	2.0	1.1	0.8	□青绿色		1000PCS
	E0308	8.0	12.5						
22A.W.G. 0.5 mm²	E0506	6.0	12.3	2.6	1.3	1.0	□白色 ■橙色	使用0.5钳口 USING 0.5 FOR	
	E0508	8.0	14.3						
	E0510	10.0	16.3						
	E0512	12.0	18.3						
20A.W.G. 0.75 mm²	E7506	6.0	12.5	2.8	1.6	1.3	■蓝色 □白色	使用0.75钳口 USING 0.75 FOR	
	E7508	8.0	14.5						
	E7510	10.0	16.5						
	E7512	12.0	18.5						
	E7515	15.0	21.5						
	E7518	18.0	24.5						

管形预绝缘端头
PIPE BARE TERMINAL

端头材质：镀锡紫铜管
绝缘套材质：尼龙　PVC
CONNECTOR MATERIAL:COPPER TUBE
INSULATION MATERIAL:NYLON







电线范围 WIRE RANGE A.W.G mm²	型号 ITEMNO	尺寸 DIMENSION					法国颜色 德国颜色 COLOR GERMANY COLOR FRANCE	使用压接工具型号 USING PRESSING AND CONNECTING TOOL TYPE	包装
		F±0.2	L±0.5	W±0.2	D±0.2	C±0.2			
18 A.W.G. 1.0 mm²	E1006	6.0	12.5	3.0	1.8	1.5	■红色 ■黄色	使用1.0钳口 USING 1.0 FOR	1000PCS
	E1008	8.0	14.5						
	E1010	10.0	16.5						
	E1012	12.0	18.5						
	E1015	15.0	21.5						
	E1018	18.0	24.5						
16A.W.G. 1.5 mm²	E1506	6.0	12.5	3.5	2.1	1.8	■黑色 ■红色	使用1.5钳口 USING 1.5 FOR	
	E1508	8.0	14.5						
	E1510	10.0	16.5						
	E1512	12.0	18.5						
	E1515	15.0	21.5						
	E1518	18.0	24.5						
14A.W.G. 2.5 mm²	E2508	8.0	15.5	4.0	2.6	2.3	■灰色 ■蓝色	使用2.5钳口 USING 2.5 FOR	
	E2510	10.0	17.5						
	E2512	12.0	19.5						
	E2515	15.0	22.5						
	E2518	18.0	25.5						
12 A.W.G. 4.0 mm²	E4009	9.0	17.0	4.7	3.2	2.8	■橙色 ■灰色	使用4.0钳口 USING 4.0 FOR	
	E4010	10.0	18.0						
	E4012	12.0	20.0						
	E4018	18.0	26.0						
10 A.W.G. 6.0 mm²	E6010	10.0	18.5	6.0	3.9	3.5	■绿色 ■黑色	使用6.0钳口 USING 6.0 FOR	500PCS
	E6012	12.0	20.5						
	E6018	18.0	26.5						
8 A.W.G. 10 mm²	E10-12	12.0	21.5	7.3	4.9	4.5	■棕色 □乳白色	使用10钳口 USING 10 FOR	
	E10-18	18.0	27.5						
	E10-25	25.0	34.5						
6A.W.G. 16 mm²	E16-12	12.0	22.0	8.5	6.2	5.8	□乳白色 ■绿色	使用16钳口 USING 16 FOR	
	E16-18	18.0	28.0						
	E16-25	25.0	35.0						
	E16-30	30.0	40.0						
4A.W.G. 25 mm²	E25-16	16.0	28.0	10.8	7.9	7.5	■黑色 ■棕色	使用25钳口 USING 25 FOR	200PCS
	E25-18	18.0	30.0						
	E25-20	20.0	32.0						
	E25-22	22.0	34.0						
	E25-25	25.0	37.0						
2A.W.G. 35 mm²	E35-16	16.0	30.0	12.0	8.7	8.3	■红色 □米色	使用35钳口 USING 35 FOR	
	E35-18	18.0	32.0						
	E35-22	22.0	34.0						
	E35-25	25.0	37.0						
1/0A.W.G. 50 mm²	E50-20	20.0	36.0	15.0	10.9	10.3	■蓝色 ■绿色	使用50钳口 USING 50 FOR	
	E50-25	25.0	41.0						
2/0A.W.G. 70 mm²	E70-20	20.0	37.0	16.0	14.3	13.5	■黄色		100PCS
	E70-25	25.0	42.0						
3/0A.W.G. 95 mm²	E95-25	25.0	44.0	18.5	15.3	14.5	■红色		
4/0A.W.G. 120 mm²	E120-12	27.0	47.6	20.0	17.5	16.5	■蓝色		50PCS
	E120-32	32.0	52.6						
250/300A.W.G. 150 mm²	E150-27	27.0	51.5	23.4	20.6	19.6	■黄色		
	E150-32	32.0	56.5						

双线插几式管形预绝缘端头
DOUBLE WIRE INSERT TYPE RING FREFAB INSULATED TERIMINAL

端头材质：镀锡紫铜管
绝缘套材质：尼龙　PVC
CONNECTOR MATERIAL:COPPER TUBE
INSULATION MATERIAL:NYLON

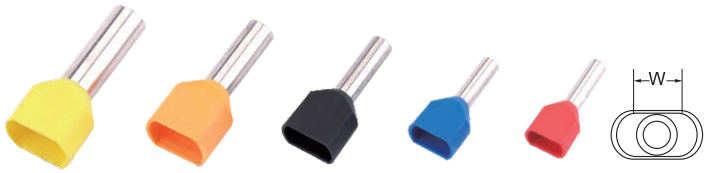




电线范围 WIRE RANGE A.W.G mm²	型号 ITEMNO	尺寸 DIMENSION F±0.5	L±0.5	W±0.5	D±0.3	C±0.3	法国颜色 德国颜色 COLOR GERMANY COLOR FRANCE	使用压接工具型号 USING PRESSING AND CONNECTING TOOL TYPE	包装
2×22A.W.G 2×0.5 mm²	TE0508	8.0	14.9	5.0	1.8	1.5	□白色 ■橙色		1000PCS
	TE0510	10.0	16.9	5.0	1.8	1.5			
2×20A.W.G 2×0.75 mm²	TE7508	8.0	15.5	5.3	2.1	1.8	■蓝色 □白色		
	TE7510	10.0	17.5	5.3	2.1	1.8			
	TE7512	12.0	19.5	5.3	2.1	1.8			
2×18A.W.G 2×1.0 mm²	TE1008	8.0	15.8	5.3	2.4/2.3	2.0	■红色 ■黄色		
	TE1010	10.0	17.8	5.3	2.4/2.3	2.0			
	TE1012	12.0	19.8	5.3	2.4/2.3	2.0			
2×16A.W.G 2×1.5 mm²	TE1508	8.0	16.5	6.1	2.6	2.3	■黑色 ■红色		
	TE1510	10.0	18.5	6.1	2.6	2.3			
	TE1512	12.0	20.5	6.1	2.6	2.3			
2×14A.W.G 2×2.5 mm²	TE2508	8.0	17.8	7.8	3.3	2.9	■灰色 ■蓝色		
	TE2510	10.0	19.8	7.8	3.3	2.9			
	TE2512	12.0	21.8	7.8	3.3	2.9			
2×12A.W.G 2×4 mm²	TE4010	10.0	20.3	8.6	4.2	3.8	■橙色 ■灰色		
	TE4012	12.0	22.3	8.6	4.2	3.8			
2×10A.W.G 2×6 mm²	TE6012	12.0	23.0	9.5	5.3	4.9	■绿色 ■黑色		500PCS
	TE6014	14.0	25.0	9.5	5.3	4.9			
2×8A.W.G 2×10 mm²	TE10-14	14.0	26.0	12.0	6.9	6.5	■棕色 □乳白色		
2×6A.W.G 2×16 mm²	TE16-14	14.0	30.6	19.0	8.7	8.3	□乳白色 ■绿色		200PCS

IT 双层扁冷压端头
IT DOUBLE TERMINAL


端子材料：紫铜
INSULATON MATERIAL:VINYL



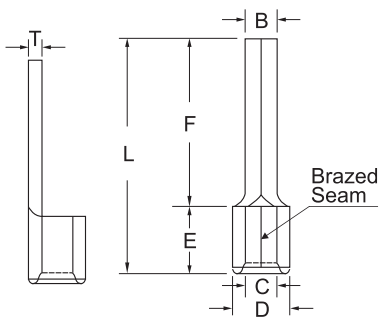

项　目 ITEM NO.	尺寸 DIMENSION B±0.3	D±0.3	C±0.3	E±0.3	L±0.5	T±0.03	包装
IT双层扁 4	3.5	5.0	3.0	6.4	19.0	1.0	
IT双层扁 6	4.5	6.2	4.0	7.0	20.5	1.0	
IT双层扁10–5	5.0	7.8	5.0	9.0	24.0	1.2	
IT双层扁16–6	8.0	10.0	7.0	10.5	30.0	1.5	
IT双层扁25–6	8.0	12.0	8.0	12.0	33.0	1.8	
IT双层扁35–6	8.0	13.0	9.0	14.0	37.0	1.8	
IT双层扁 50	9.0	15.0	11.3	14.0	37.0	1.8	
IT双层扁 70	15.0	17.5	12.5	24.0	55.0	2.2	

非绝缘对接&并接连接器
Non-Insulated Butt & Paralle Connectors







材料：无缝管
MATERIAL: SEAMLESS TUBE

项 目 ITEM NO.	适用线材 AWG#(mm²) Applicable Wire AWG#(mm²)	L±0.5	d±0.3	ΦD±0.3	包装
BNT 1	22-16(0.5-1.5)	15.0	2.1	3.3	1000PCS
BNT 2	16-14(1.5-2.5)	15.0	2.8	4.0	
BNT 3	3-4²	15.0	3.4	5.0	500PCS
BNT 5	12-10(4-6)	15.0	4.0	5.5	
BNT 8	8-10 mm	21.0	5.0	7.0	
BNT 14	14-16 mm	26.0	6.3	8.9	100PCS
BNT 22	22-25 mm	29.0	8.3	11.3	
BNT 38	35-38 mm	32.0	10.0	13.0	

乙烯基&尼龙-绝缘对接连接器
Vinyl & Nylon-Insulated Butt Connectors






材料：无缝管（PVC）
MATERIAL: SEAMLESS TUBE (PVC)

项 目 ITEM NO.	适用线材 AWG#(mm²) Applicable Wire AWG#(mm²)	E±0.3	L±0.3	ΦD±0.3	包装
BV 1.25	22-16(0.5-1.5)	15.0	25.0	4.0	500PCS
BV 2	16-14(1.5-2.5)	15.0	25.0	4.5	
BV 5	12-10(4-6)	15.0	26.0	6.3	
BV 8	8-10 mm	21.5	35.6	8.0	200PCS

乙烯基-绝缘并接连接器
Vinyl-Insulated Paralle Connectors






材料：无缝管（PVC）
MATERIAL: SEAMLESS TUBE (PVC)

项 目 ITEM NO.	适用线材 AWG#(mm²) Applicable Wire AWG#(mm²)	E±0.3	L±0.3	ΦD±0.3	包装
PVT 1	22-16(0.5-1.5)	8.0	16.0	4.0	500PCS
PVT 2	16-14(1.5-2.5)	8.0	16.0	4.5	
PVT 5	12-10(4-6)	8.5	20.0	6.3	

圆形裸端头
ROUND SHAPE NAKED TERMINAL

端子材料：紫铜
TERMINAL MATERIAL:COPPER



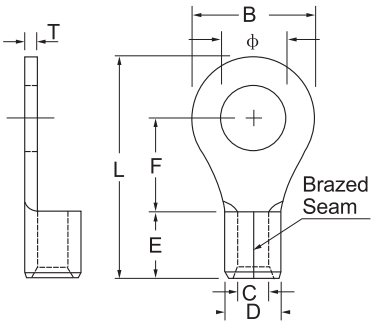


线范围 WIRE RANGE A.W.G. mm²	项 目 ITEM NO.	尺寸 DIMENSION							包装
		Φ ± 0.3	B±0.3	L±0.5	E±0.3	D±0.3	C±0.3	T±0.03	
22-16 A.W.G. 0.5-1.5 mm²	RNB1.25-3.2	3.2	5.5	12.5	4.8	3.4	1.9	0.75	1000PCS
	RNB1.25-3.5	3.7	5.5	12.5					
	RNB1.25-4	4.2	6.6	14.4					
	RNBM1.25-4	4.2	8.0	15.8					
	RNB1.25-5	5.2	8.0	15.8					
	RNB1.25-6	6.2	11.6	21.8					
	RNB1.25-8	8.2	11.6	21.8					
	RNB1.25-10	10.2	13.6	25.5					
	RNB1.25-12	12.2	19.2	30.4					
16-14 A.W.G. 1.5-2.5 mm²	RNB2-3.2	3.2	6.6	12.8	4.8	4.0	2.4	0.8	
	RNB2-3.5	3.7	6.6	14.4					
	RNB2-4	4.2	6.6	14.4					
	RNBM2-4	4.2	8.5	16.8					
	RNB2-5	5.2	8.5	16.8					
	RNBL2-5	5.2	9.5	16.8					
	RNB2-6	6.2	12.0	21.8					
	RNB2-8	8.2	12.0	21.8					
	RNB2-10	10.2	13.6	30.4					
	RNB2-12	12.2	19.2	39.3					
14-12 A.W.G. 2.5-4 mm²	RNB3.5-4	4.2	8.0	18.0	6	5.0	3.0	1.0	500PCS
	RNB3.5-5	5.2	8.0	18.0					
	RNBL3.5-5	5.2	12.0	21.4					
	RNB3.5-6	6.2	12.0	21.4					
	RNB3.5-8	8.2	15.0	27.0					
12-10 A.W.G. 4-6mm²	RNB5.5-4	4.2	9.5	15.7	6	5.6	3.5	1.0	
	RNB5.5-5	5.2	9.5	19.6					
	RNB5.5-6	6.2	12.0	22.5					
	RNB5.5-8	8.2	15.0	27.0					
	RNB5.5-10	10.2	15.0	27.0					
	RNB5.5-12	12.2	19.2	31.6					

圆形裸端头
ROUND SHAPE NAKED TERMINAL

端子材料：紫铜
TERMINAL MATERIAL:COPPER



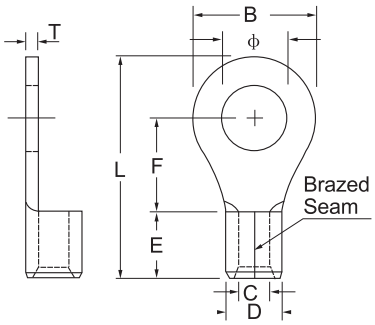


线范围 WIRE RANGE A.W.G. mm²	项 目 ITEM NO.	尺寸 DIMENSION							包装
		Φ ± 0.3	B±0.3	L±0.5	E±0.3	D±0.3	C±0.3	T±0.03	
8 A.W.G. 8 mm²	RNB8-4	4.3	8.0	21.5	8.5	7.2	4.8	1.2	500PCS
	RNB8-5	5.3	8.8	23.5					
	RNBM8-5	5.3	12.0	23.5					
	RNB8-6	6.3	12.0	23.5					
	RNB8-8	8.3	15.0	29.5					
	RNB8-10	10.3	15.0	29.5					
	RNB8-12	12.3	20.0	33.5					
6 A.W.G. 14 mm²	RNB14-5	5.3	12.0	29.8	10.5	9.0	6.0	1.5	100PCS
	RNB14-6	6.3	12.0	29.8					
	RNBL14-6	6.3	16.0	32.5					
	RNB14-8	8.3	16.0	32.5					
	RNB14-10	10.3	16.0	32.5					
	RNB14-12	12.3	22.0	41.0					
4A.W.G. 22mm²	RNB22-6	6.2	12.2	33.0	12	11.5	7.9	1.8	
	RNBL22-6	6.2	16.5	33.5					
	RNB22-8	8.2	16.5	33.5					
	RNB22-10	10.5	16.5	33.5					
	RNB22-12	12.5	22.0	42.5					
2A.W.G. 38 mm²	RNB38-6	6.3	15.3	39	14.0	13.3	9.7	1.8	
	RNBL38-6	6.3	22.0	42.7					
	RNB38-8	8.3	15.3	39.0					
	RNBL38-8	8.3	22.0	42.7					
	RNB38-10	10.3	15.3	39					
	RNBL38-10	10.3	22.0	42.7					
	RNB38-12	12.3	22.0	42.7					
1/0 A.W.G. 60 mm²	RNB60-6	6.3	22.0	49.7	18.0	15.4	11.8	1.8	
	RNB60-8	8.3							
	RNB60-10	10.3							
	RNB60-12	12.3							

圆形裸端头
ROUND SHAPE NAKED TERMINAL

端子材料：紫铜
TERMINAL MATERIAL:COPPER



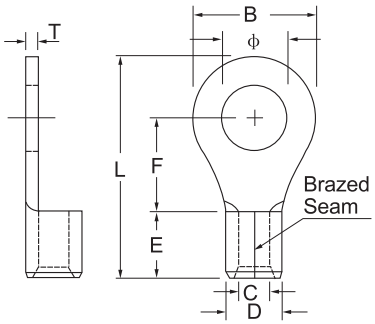


线范围 WIRE RANGE A.W.G. mm²	项 目 ITEM NO.	尺寸 DIMENSION							包装
		Φ ± 0.3	B±0.3	L±0.5	E±0.3	D±0.3	C±0.3	T±0.03	
2/0 A.W.G. 70mm²	RNB70-6	6.3	24.0	50.0	18.0	17.5	13.1	2.2	100PCS
	RNB70-8	8.3							
	RNB70-10	10.3							
	RNB70-12	12.3							
3/0 A.W.G. 80 mm²	RNB80-8	8.3	27.0	54.2	20.0	19.5	15.0	2.2	
	RNB80-10	10.3							
	RNB80-12	12.3							
4/0 A.W.G. 100mm²	RNB100-8	8.3	28.5	55.6	21.0	22.1	16.4	2.6	
	RNB100-10	10.3							
	RNB100-12	12.3							
250/300 MCM A.W.G. 150 mm²	RNB150-10	10.3	36.0	66.0	27.0	26.6	20.0	3.2	
	RNB150-12	12.3							
	RNB150-14	14.3							
	RNB150-16	16.3							
300/350 MCM A.W.G. 180mm²	RNB180-10	10.3	38.5	69.0	28.5	28.6	21.0	3.6	
	RNB180-12	12.3							
	RNB180-14	14.3							
	RNB180-16	16.3							
400/500 MCM A.W.G. 200 mm²	RNB200-10	10.5	44.0	78.0	31.5	32.5	24.5	4.0	
	RNB200-12	12.5							
	RNB200-14	14.3							

叉形裸端头
FORK SHAPE NAKED TERMINAL


端子材料：紫铜
TERMINAL MATERIAL:COPPER



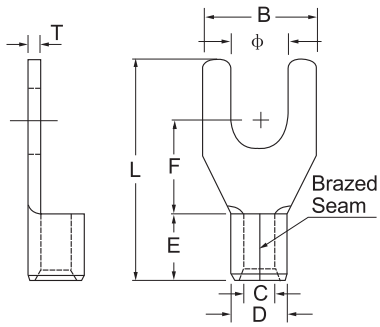

线范围 WIRE RANGE A.W.G. mm²	项 目 ITEM NO.	尺寸 DIMENSION							包装
		Φ ± 0.3	B±0.3	L±0.5	E±0.3	D±0.3	C±0.3	T±0.03	
22-16 A.W.G. 0.5-1.5 mm²	SNB1.25-3.2	3.2	5.7	16.0	4.8	3.4	1.9	0.75	1000PCS
	SNB1.25-3.5	3.7	5.7						
	SNB1.25-4	4.2	6.4						
	SNBM1.25-4	4.2	7.2						
	SNB1.25-5	5.2	8.1						
	SNB1.25-6	6.2	9.5						
16-14 A.W.G. 1.5-2.5 mm²	SNB2-3.2	3.2	5.7	16.0	4.8	4.0	2.4	0.8	
	SNB2-3.5	3.7	5.7						
	SNB2-4	4.2	6.4						
	SNBM2-4	4.2	7.2						
	SNB2-5	5.2	8.1						
	SNBL2-5	5.2	9.3						
	SNB2-6	6.2	9.3						
14-12 A.W.G. 2.5-4 mm²	SNB3.5-4	4.2	8.0	18.0	6.0	5.0	3.0	1.0	500PCS
	SNB3.5-5	5.2	8.0	18.0					
	SNB3.5-6	6.2	12.0	21.5					
12-10 A.W.G. 4-6mm²	SNB5.5-4	4.2	8.3	18.5	6.0	5.6	3.5	1.0	
	SNB5.5-5	5.2	9.0	18.5					
	SNBS5.5-6	6.2	9.0	18.5					
	SNBL5.5-6	6.2	12.0	24.5					
	SNB5.5-8	8.2	14.0	23.5					
8 A.W.G. 8 mm²	SNB8-5	5.3	10.5	23.0	8.5	7.2	4.8	1.2	
	SNB8-6	6.3	10.8	24.0					
	SNB8-8	8.3	14.0	28.5					
6 A.W.G. 14 mm²	SNB14-5	5.3	12.0	29.0	10.5	9.0	6.0	1.5	100PCS
	SNB14-6	6.3	12.0						
	SNB14-8	8.3	14.0						
4A.W.G. 22mm²	SNB22-8	8.3	14.0	34.0	12.0	11.5	7.9	1.8	


片形裸端头
PLATE SHAPE NAKED TERMINAL

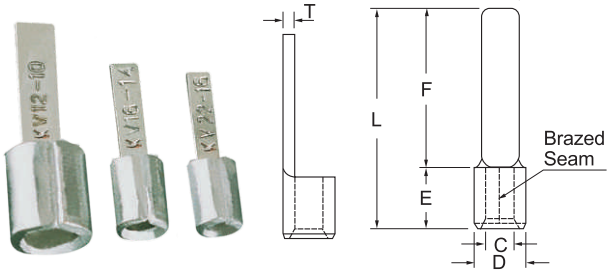

端子材料：紫铜
TERMINAL MATERIAL:COPPER

线范围 WIRE RANGE A.W.G. mm²	项 目 ITEM NO.	尺寸 DIMENSION						包装
		B±0.3	L±0.5	E±0.3	D±0.3	C±0.3	T±0.03	
22-16 A.W.G. 0.5-1.5 mm²	DBN1.25-10	2.4	15.0	5.0	3.4	1.9	0.75	1000PCS
	DBN1.25-14	2.4	19.0					
	DBN1.25-18	2.4	23.0					
16-14 A.W.G. 1.5-2.5 mm²	DBN2-10	2.5	15.0	5.0	4.0	2.4	0.8	
	DBN2-14	2.5	19.0					
	DBN2-18	2.5	23.0					
12-10 A.W.G. 4-6mm²	DBN5.5-10	2.8	17.5	6.0	5.6	3.5	1.0	500PCS
	DBN5.5-14	4.5	20.0					
	DBN5.5-18	4.5	24.0					
8 A.W.G. 8 mm²	DBN8-14	5.0	22.5	8.5	7.2	4.8	1.2	200PCS
6 A.W.G. 14 mm²	DBN14-16	6.0	26.5	10.5	9.0	6.0	1.5	

针形裸端头
NEEDLE SHAPE NAKED TERMINAL

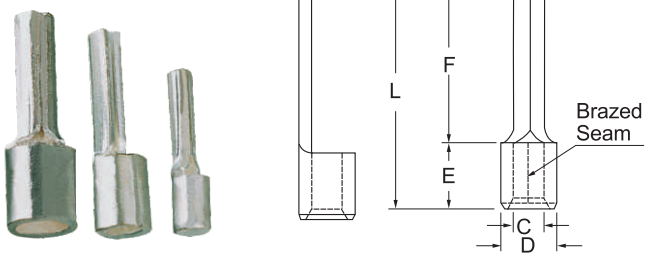


端子材料：紫铜
TERMINAL MATERIAL:COPPER

线范围 WIRE RANGE A.W.G. mm²	项 目 ITEM NO.	尺寸 DIMENSION						包装
		B±0.3	L±0.5	E±0.3	D±0.3	C±0.3	T±0.03	
22-16 A.W.G. 0.5-1.5 mm²	PTN1.25-10	2.0	15.0	5.0	3.4	1.9	0.75	500PCS
	PTN1.25-13		18.0					
	PTN1.25-18		23.0					
16-14 A.W.G. 1.5-2.5 mm²	PTN2-10	2.0	15.0	5.0	4.0	2.4	0.8	
	PTN2-13		18.0					
	PTN2-18		23.0					
12-10 A.W.G. 2.5-6 mm²	PTN5.5-13	3.0	20.0	6.0	5.6	3.5	1.0	250PCS
	PTN5.5-18		25.0					

圆形冷压端头
CIRCULAR COLD PRESS TERMINAL





端子材料：紫铜　TERMINAL MATERIAL:COPPER


项　目 ITEM NO.	尺寸 DIMENSION							包装
	Φ ± 0.3	B±0.3	L±0.5	E±0.3	D±0.3	C±0.3	T±0.03	
OT0.5-3	3.2	6.0	13.0	4.0	2.3	1.3	0.5	2000PCS
OT0.5-4	4.2	7.0	14.0					
OT1-3	3.2	6.0	14.5	5.0	3.2	1.7	0.7	
OT1-4	4.2	7.6	16.6					
OT1.5-3	3.2	6.0	14.4	5.0	3.6	2.2	0.7	
OT1.5-4	4.2	7.8	16.6					
OT1.5-5	5.2	9.5	19.3					
OT1.5-6	6.2	11.5	21.5					
OT1.5-8	8.2	15.0	25.0					
OT1.5-10	10.2	18.0	29.0					
OT1.5-12	12.2	18.0	29.0					
OT1.5-16	16.2	24.0	34.0					
OT2.5-3	3.2	6.5	15.0	5.0	4.2	2.8	0.7	1000PCS
OT2.5-4	4.2	7.6	17.0					
OT2.5-5	5.2	9.5	19.3					
OT2.5-6	6.2	11.0	21.4					
OT2.5-8	8.2	15.0	25.0					
OT2.5-10	10.2	18.0	29.0					
OT2.5-12	12.2	18.0	29.0					
OT2.5-14	14.2	24.0	34.0					
OT2.5-16	16.2	24.0	34.0					
OT4-4	4.2	8.5	18.1	6.0	5.3	3.0	1.0	
OT4-5	5.2	10.0	20.5					
OT4-6	6.2	12.0	23.2					
OT4-8	8.2	15.0	26.5					
OT4-10	10.2	18.0	31.2					
OT4-12	12.2	19.5	33.2					500PCS
OT4-16	16.2	25.0	38.5					
OT6-4	4.2	9.0	19.5	7.0	6.2	4.2	1.0	1000PCS
OT6-5	5.2	11.0	23.0					
OT6-6	6.2	12.0	24.5					
OT6-8	8.2	15.0	27.5					
OT6-10	10.5	18.2	32.3					
OT6-12	12.5	20.0	34.0					
OT6-14	14.5	25.0	39.2					
OT6-16	16.5	25.0	39.2					
OT6-18	18.5	29.0	44.0					
OT6-20	20.5	32.0	47.0					
OT6-22	22.5	32.0	47.0					
OT10-4	4.2	10.0	23.2	8.5	8.0	5.6	1.2	500PCS
OT10-5	5.2	12.0	26.0					
OT10-6	6.2	14.0	27.5					
OT10-8	8.2	16.0	30.2					
OT10-10	10.5	17.3	34.3					
OT10-12	12.5	21.0	38.2					
OT10-14	14.5	23.0	40.8					
OT10-16	16.5	25.0	42.1					
OT10-18	18.5	32.2	48.5					200PCS
OT10-20	20.5	32.2	48.5					
OT10-22	22.5	32.2	48.5					
OT10-24	24.5	40.0	58.5					
OT10-28	28.5	40.0	58.5					

凤凰冷压端头
PHOENIX COLD PRESS TERMINAL

圆形冷压端头
CIRCULAR COLD PRESS TERMINAL

端子材料：紫铜
TERMINAL MATERIAL:COPPER






项 目 ITEM NO.	尺寸 DIMENSION							包装
	Φ ± 0.3	B±0.3	L±0.5	E±0.3	D±0.3	C±0.3	T±0.03	
OT16-5	5.2	15.0	31.0	10.5	10.0	7.0	1.5	200PCS
OT16-6	6.2	15.0	31.0					
OT16-8	8.2	18.0	33.5					
OT16-10	10.5	20.0	38.0					
OT16-12	12.5	23.0	41.5					
OT16-14	14.5	23.0	41.5					
OT16-16	16.5	30.0	54.0	14.0				100PCS
OT16-18	18.5	30.0	54.0					
OT16-20	20.5	35.0	57.0					
OT16-22	22.5	35.0	57.0					
OT16-24	24.5	35.0	57.0					
OT25-6	6.2	17.0	33.5	14.0	12.1	8.5	1.8	200PCS
OT25-8	8.2	20.0	37.5					
OT25-10	10.5	22.0	40.5					
OT25-12	12.5	24.0	45.0					
OT25-14	14.5	26.0	47.0					
OT25-16	16.5	26.0	47.0					100PCS
OT25-18	18.5	30.0	54.0					
OT25-20	20.5	35.0	57.0					
OT25-22	22.5	35.0	57.0					
OT25-24	24.5	35.0	57.0					
OT25-27	27.5	50.0	74.0					
OT25-30	30.5	50.0	74.0					
OT25-33	33.5	50.0	74.0					
OT35-6	6.2	17.0	35.0	14.0	13.1	9.5	1.8	200PCS
OT35-8	8.2	21.0	38.5					
OT35-10	10.5	23.0	43.0					100PCS
OT35-12	12.5	25.0	47.0					
OT35-14	14.5	27.0	50.0					
OT35-16	16.5	30.0	54.0					
OT35-18	18.5	30.0	54.0					
OT35-20	20.5	35.0	57.0					
OT35-22	22.5	35.0	57.0					
OT35-24	24.5	35.0	57.0					
OT35-37	37.5	55.0	85.0					
OT50-6	6.2	20.0	37.0	14.0	15.1	11.5	1.8	
OT50-8	8.2	22.0	39.0					
OT50-10	10.5	24.5	43.5					
OT50-12	12.5	26.0	47.5					
OT50-14	14.5	30.0	54.0					
OT50-16	16.5	30.0	54.0					
OT50-18	18.5	30.0	54.0					
OT50-20	20.5	35.0	57.0					
OT50-22	22.5	35.0	57.0					
OT50-24	24.5	35.0	57.0					
OT70-6	6.2	22.0	49.0	18.5	17.5	13.1	2.2	
OT70-8	8.2	22.0	49.0					
OT70-10	10.5	24.5	51.0					
OT70-12	12.5	24.5	51.0					
OT70-14	14.5	29.5	60.0					
OT70-16	16.5	29.5	60.0					
OT70-18	18.5	29.5	60.0					50PCS
OT70-20	20.5	38.0	65.0					
OT70-22	22.5	38.0	65.0					
OT70-24	24.5	38.0	65.0					
OT95-6	6.2	23.0	51.0	20.0	19.5	15.1	2.2	
OT95-8	8.2							
OT95-10	10.5	27.0	53.0					
OT95-12	12.5							
OT95-14	14.5	29.0	65.0					
OT95-16	16.5							
OT95-18	18.5							
OT95-20	20.5	38.0	70.0					
OT95-22	22.5							
OT95-24	24.5							

凤凰冷压端头
PHOENIX COLD PRESS TERMINAL

圆形冷压端头
CIRCULAR COLD PRESS TERMINAL






端子材料：紫铜　TERMINAL MATERIAL:COPPER

项　目 ITEM NO.	尺寸 DIMENSION							包装
	Φ ± 0.3	B±0.3	L±0.5	E±0.3	D±0.3	C±0.3	T±0.03	
OT120-8	8.5	30.0	60.0	22.0	22.5	17.0	2.6	50PCS
OT120-10	10.5							
OT120-12	12.5							
OT120-14	14.5							
OT120-16	16.5							
OT120-18	18.5	39.0	75.0					
OT120-20	20.5							
OT120-24	24.5							
OT150-8	8.5	31.0	64.0	25.5	24.5	18.1	3.2	
OT150-10	10.5							
OT150-12	12.5							
OT150-14	14.5							
OT150-16	16.5							
OT150-20	20.4	39.0	78.0					20PCS
OT185-8	8.5	32.0	67.0	27.0	27.2	20.0	3.6	
OT185-10	10.5							
OT185-12	12.5							
OT185-14	14.5							
OT185-16	16.5							
OT185-20	20.5	39.0	80.0					
OT240-8	8.5	38.0	70.0	30.0	32.0	24.0	4.0	
OT240-10	10.5							
OT240-12	12.5							
OT240-14	14.5							
OT240-16	16.5							
OT300-10	10.5	50.5	103.0	35.0	37.5	29.0	4.2	
OT300-12	12.5							
OT300-14	14.5							
OT300-16	16.5							
OT300-18	18.5							
OT300-20	20.5							

圆形冷压端头
CIRCULAR COLD PRESS TERMINAL






端子材料：紫铜　TERMINAL MATERIAL:COPPER

项　目 ITEM NO.	尺寸 DIMENSION							包装
	Φ±0.3	B±0.3	L±0.5	E±0.3	D±0.3	C±0.3	T±0.03	
OTZ10-6	6.2	12.0	27.0	8.5	8.0	5.6	1.2	500PCS
OTZ10-8	8.2	15.0	30.0					
OTZ16-6	6.2	13.0	30.5	10.5	10.0	7.0	1.5	200PCS
OTZ16-8	8.2	15.0	35.0					
OTZ16-10	10.5	17.0	37.0					
OTZ25-6	6.2	13.0	31.0	12.0	12.1	8.5	1.8	
OTZ25-8	8.2	16.0	34.0					
OTZ25-10	10.5	18.0	40.0					
OTZ25-12	12.5	18.0	40.0					
OTZ35-6	6.2	13.0	35.0	14.0	13.1	9.5	1.8	
OTZ35-8	8.2	16.0	40.0					100PCS
OTZ35-10	10.5	18.0	40.0					
OTZ35-12	12.5	18.2	40.7					
OTZ50-6	6.2	13.0	35.0	14.0	15.1	11.5	1.8	
OTZ50-8	8.2	16.0	40.0					
OTZ50-10	10.5	18.0	41.0					
OTZ50-12	12.5	20.0	42.0					


圆形冷压端头
CIRCULAR COLD PRESS TERMINAL






端子材料：紫铜
TERMINAL MATERIAL:COPPER


项 目 ITEM NO.	尺寸 DIMENSION							包装
	Φ ± 0.3	B±0.3	L±0.5	E±0.3	D±0.3	C±0.3	T±0.03	
OTS16-6	6.2	13.0	29.5	10.5	10.0	7.4	1.3	200PCS
OTS16-8	8.2	16.0	32.0					
OTS16-10	10.5	18.0	35.0					
OTS16-12	12.5	21.0	39.0					
OTS25-6	6.2	13.0	31.0	12.0	12.0	8.8	1.6	
OTS25-8	8.2	16.0	34.0					
OTS25-10	10.5	19.0	37.0					
OTS25-12	12.5	21.0	40.0					
OTS35-8	8.2	17.0	36.0	14.0	13.0	9.8	1.6	
OTS35-10	10.5	19.0	39.5					100PCS
OTS35-12	12.5	21.0	41.5					
OTS50-6	6.2	18.0	39.0	14.0	15.0	11.8	1.6	
OTS50-8	8.2	18.0	39.0					
OTS50-10	10.5	20.0	42.0					
OTS50-12	12.5	24.0	44.0					
OTS70-10	10.5	22.0	49.0	18.5	17.5	13.1	2.2	
OTS95-10	10.5	23.0	51.0	20.0	19.5	15.1	2.2	50PCS

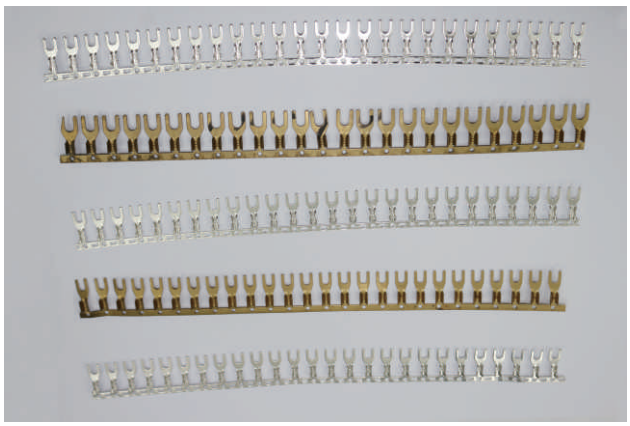

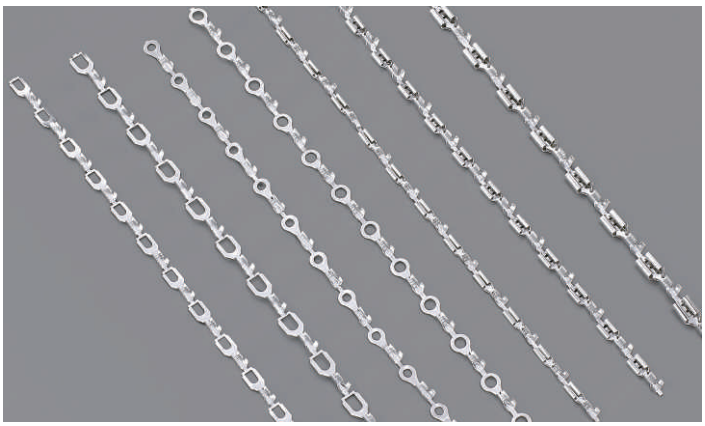

叉形冷压端头
FORK COLD PRESS TERMINAL



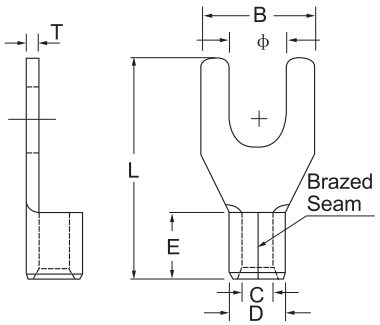


端子材料：紫铜
TERMINAL MATERIAL:COPPER

项 目 ITEM NO.	尺寸 DIMENSION							包装
	Φ ± 0.3	B±0.3	L±0.5	E±0.3	D±0.3	C±0.3	T±0.03	
UT0.5-3	3.2	6.0	13.5	4.0	2.2	1.2	0.5	2000PCS
UT0.5-4	4.2	7.0	13.8					
UT1-3	3.2	5.7	15.5	5.0	3.2	1.8	0.7	1000PCS
UT1-4	4.2	7.1	16.0					
UT1.5-3	3.2	5.9	15.5	5.0	3.6	2.2	0.7	
UT1.5-4	4.2	7.3	16.5					
UT1.5-5	5.2	9.0	18.3					
UT1.5-6	6.2	11.8	20.0					
UT1.5-8	8.2	14.6	23.7					
UT2.5-3	3.2	6.0	15.5	5.0	4.2	2.8	0.7	
UT2.5-4	4.2	7.6	17.0					
UT2.5-5	5.2	9.5	18.0					
UT2.5-6	6.2	11.0	20.0					
UT2.5-8	8.2	14.8	24.1					
UT4-4	4.2	8.6	18.6	6.0	5.2	3.2	1.0	
UT4-5	5.2	9.4	19.6					
UT4-6	6.2	11.8	22.1					
UT4-8	8.2	14.9	25.2					
UT4-10	10.5	18.0	27.0					500PCS
UT6-4	4.2	9.0	19.5	7.0	6.2	4.2	1.0	1000PCS
UT6-5	5.2	11.0	21.0					
UT6-6	6.2	12.0	23.0					
UT6-8	8.2	15.0	26.0					
UT6-10	10.5	17.4	30.0					500PCS
UT10-4	4.2	10.0	24.0	8.5	8.0	5.6	1.2	
UT10-5	5.2	10.0	24.0					
UT10-6	6.2	12.0	27.0					
UT10-8	8.2	14.4	28.6					
UT10-10	10.5	16.3	31.5					
UT16-5	5.2	11.5	26.0	11.0	10.0	7.0	1.5	200PCS
UT16-6	6.2	12.5	29.5					
UT16-8	8.2	16.0	32.0					
UT16-10	10.5	19.0	33.5					
UT25-6	6.2	16.0	35.0	14.0	12.1	8.5	1.8	
UT25-8	8.2	18.0	35.0					
UT25-10	10.5	20.0	35.0					
UT35-6	6.2	14.5	36.0	14.0	13.1	9.5	1.8	
UT35-8	8.2	17.5	40.0					
UT35-10	10.5	22.0	42.0					

圆形船用裸端头
BARE CIRCULAR TERMIANL FOR WATERCRAFT



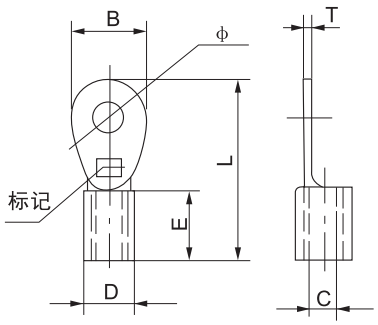


端子材料：紫铜
TERMINAL MATERIAL:COPPER

项 目 ITEM NO.	尺寸 DIMENSION							包装
	Φ ± 0.3	B±0.3	L±0.5	E±0.3	D±0.3	C±0.3	T±0.03	
JB0.75-3	3.2	6.0	17.0	7.0	3.3	1.3	0.7	1000PCS
JB0.75-4	4.2	7.5	18.0					
JB0.75-6	6.2	10.0	20.5					
JB1-3	3.2	6.0	17.0	7.0	3.7	1.7	0.7	
JB1-4	4.2	7.5	18.0					
JB1-5	5.2	8.0	18.0					
JB1-6	6.2	10.0	20.5					
JB1.5-3	3.2	6.0	17.0	7.0	4.05	2.0	0.7	
JB1.5-4	4.2	7.5	18.0					
JB1.5-5	5.2	8.0	18.0					
JB1.5-6	6.2	10.0	20.5					
JB1.5-8	8.2	13.0	26.0					
JB2.5-3	3.2	6.0	17.0	8.5	4.6	2.6	0.7	
JB2.5-4	4.2	8.0	20.0					
JB2.5-5	5.2	9.0	21.5					
JB2.5-6	6.2	10.5	23.5					
JB2.5-8	8.2	13.5	28.5					
JB4-4	4.2	9.0	22.0	9.0	5.3	2.8	0.8	
JB4-5	5.2	9.0	22.0					
JB4-6	6.2	12.0	27.0					
JB4-8	8.2	13.5	28.5					
JB4-10	10.5	15.6	29.3					
JB6-4	4.2	11.0	26.0	10.0	6.2	3.5	1.0	500PCS
JB6-5	5.2	11.0	26.0					
JB6-6	6.2	12.5	29.0					
JB6-8	8.2	13.5	29.0					
JB6-10	10.5	15.5	30.0					
JB10-4	4.2	10.5	27.0	11.0	7.8	4.3	1.2	
JB10-5	5.2	10.5	27.0					
JB10-6	6.2	12.5	29.0					
JB10-8	8.2	14.0	31.0					
JB10-10	10.5	17.5	35.5					
JB16-6	6.2	13.5	31.0	12.0	9.5	5.7	1.3	200PCS
JB16-8	8.2	15.0	32.5					
JC1-3	3.2	6.0	16.6	7.0	3.7	1.7	0.7	1000PCS
JC1-4	4.2	7.5	18.0					
JC1.5-3	3.2	6.0	16.5	7.0	4.05	2.0	0.7	
JC1.5-4	4.2	7.5	18.0					
JC1.5-5	5.2	8.4	19.2					
JC1.5-6	6.2	9.7	20.2					
JC2.5-3	3.2	6.0	19.0	8.5	4.6	2.6	0.7	
JC2.5-4	4.2	7.5	20.5					
JC2.5-5	5.2	8.3	21.0					
JC2.5-6	6.2	10.5	22.0					
JC4-4	4.2	8.3	21.3	9.0	5.3	2.8	0.8	
JC4-5	5.2	9.3	21.8					
JC4-6	6.2	11.5	23.0					
JC6-4	4.2	8.5	22.2	10.0	6.2	3.5	1.0	
JC6-5	5.2	10.5	24.3					
JC6-6	6.2	11.0	25.3					
JZ 0.75		2.0	19.0	7.0	3.3	1.3	0.7	1000PCS
JZ 1		2.0	19.0	7.0	3.7	1.7	0.7	
JZ 1.5		2.0	19.0	7.0	4.05	2.0	0.7	
JZ 2.5		2.0	20.0	8.5	4.6	2.6	0.7	
JZ 4		2.5	22.0	9.0	5.3	2.8	0.8	
JZ 6		3.0	24.5	10.0	6.2	3.5	1.0	

针形冷压端头
PIN COLD TERMINAL






端子材料：紫铜
TERMINAL MATERIAL:COPPER

项 目 ITEM NO.	尺寸 DIMENSION						包装
	B±0.3	L±0.5	E±0.3	D±0.3	C±0.3	T±0.03	
IT0.5-1	1.5	12.0	4.0	2.2	1.2	0.5	1000PCS
IT1-2	2.0	15.0	4.0	3.2	1.7	0.7	
IT1.5-2	2.0	16.0	5.0	3.6	2.0	0.7	
IT1.5-3	3.0	17.0					
IT2.5-2	2.0	16.5	5.0	4.2	2.6	0.7	
IT2.5-3	3.0	18.0					
IT4-3	3.0	19.0	6.0	5.2	3.2	1.0	
IT6-4	4.0	20.5	7.0	6.2	4.2	1.0	
IT10-5-15.5	5.0	24.0	8.5	8.0	5.6	1.2	500PCS
IT10-5-30	4.0	39.0	9.0				
IT16-6-19	6.0	30.0	11.0	10.0	7.0	1.5	200PCS
IT16-5-23	5.0	34.5					
IT16-5-30	5.0	41.5					100PCS
IT25-6-21	6.0	33.0	12.0	12.0	8.0	1.8	200PCS
IT25-6-23	6.0	35.5					
IT25-6-30	6.0	42.0					100PCS
IT35-6-23	6.0	37.0	14.0	13.0	9.0	1.8	
IT50-7	7.0	38.0	14.0	15.0	11.0	1.8	

C45 插片焊缝
C45 INSERTING SLICE WELDING SEAM



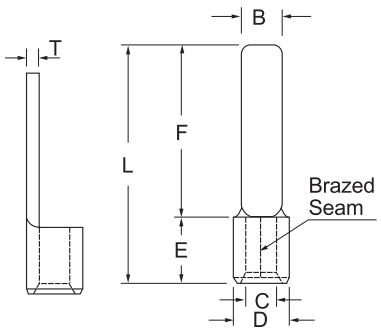


端子材料：紫铜
TERMINAL MATERIAL:COPPER

项 目 ITEM NO.	尺寸 DIMENSION						包装
	B±0.3	L±0.5	E±0.3	D±0.3	C±0.3	T±0.03	
C45 1.5	6.0	17.0	5.0	3.6	2.2	0.7	1000PCS
C45 1.5	6.0	20.0					
C45 2.5	6.0	17.0	5.0	4.2	2.8	0.7	
C45 2.5	6.0	20.0					
C45 4	6.0	18.0	6.0	5.0	3.0	1.0	
C45 4	6.0	21.0					
C45 6	6.0	19.0	7.0	6.2	4.0	1.0	
C45 6	6.0	22.0					
C45 10	6.0	22.5	8.5	8.0	5.6	1.2	500PCS
C45 16-6	6.0	26.0	11.0	10.0	7.0	1.5	
C45 16-7	7.0	38.0					
C45 16-8	8.0	26.0					
C45 25-7	7.0	28.0	12.0	12.1	8.5	1.8	200PCS
C45 25-7-26	26.0	38.0					
C45 25-8	8.0	28.0					
C45 35-8	8.0	31.0	14.0	13.1	9.5	1.8	100PCS
C45 50-8	8.0	32.0	14.0	15.1	11.5	1.8	
C45 50-8	30.0	44.0					
C45 50-12	12.0	35.0					
C45 70-10	10.0	39.5	18.7	17.5	13.1	2.2	

母对接端头（尼龙）
FEMALE PRE-INSULATION TERMINAL






绝缘材料：绝缘　尼龙PVC
绝缘颜色
22-16 A.W.G:红色　16-14A.W.G:蓝色　12-10 A.W.G:黄色
端子材料：黄铜
22-16 A.W.G:C=1.7mm　16-14A.W.G:C=2.3mm　12-10A.W.G:C=3.4mm
INSULATION COLOR:VINYL　TERMINA AMTERIAL.BRASS
INSULATION COLOR:
22-16 A.W.G:RED 16-14A.W.G:BLUE 12-10 A.W.G:YELLOW
TERMINAL MATERIAL:COPPER
22-16 A.W.G:C=1.7mm　16-14A.W.G:C=2.3mm　12-10A.W.G:C=3.4mm

项　目 ITEM NO.	适用线材 AWG Applicable Wire AWG	尺寸 DIMENSION				包装
		B±0.3	L±0.5	ΦD±0.3	C±0.3	
FDFN1.25-110(5)	18-16(0.75-1.5)	3.1	19.8	4.0	1.7	500PCS
FDFN1.25-187(5)	18-16(0.75-1.5)	5.0	20.0	4.0	1.7	
FDFN1.25-250(8)	18-16(0.75-1.5)	6.6	22.0	4.25	1.7	
FDFN2-187(5)	16-14(1.5-2.5)	5.0	20.0	4.6	2.3	
FDFN2-250(8)	16-14(1.5-2.5)	6.6	22.0	4.6	2.3	
FDFN5.5-250(8)	12-10(4-6)	6.6	24.0	6.3	3.4	

公对接端头（尼龙）
MALE PRE-INSULATIONTERMINAL







绝缘材料：绝缘　尼龙PVC
绝缘颜色
22-16 A.W.G:红色　16-14A.W.G:蓝色　12-10 A.W.G:黄色
端子材料：黄铜
22-16 A.W.G:C=1.7mm　16-14A.W.G:C=2.3mm　12-10A.W.G:C=3.4mm
INSULATION COLOR:VINYL　TERMINA AMTERIAL.BRASS
INSULATION COLOR:
22-16 A.W.G:RED 16-14A.W.G:BLUE 12-10 A.W.G:YELLOW
TERMINAL MATERIAL:COPPER
22-16 A.W.G:C=1.7mm　16-14A.W.G:C=2.3mm　12-10A.W.G:C=3.4mm

项　目 ITEM NO.	适用线材 AWG Applicable Wire AWG	尺寸 DIMENSION				包装
		B±0.3	L±0.5	ΦD±0.3	C±0.3	
MDFN1.25-250(8)	18-16(0.75-1.5)	6.35	23.3	4.25	1.7	500PCS
MDFN2-250(8)	16-14(1.5-2.5)	6.35	23.3	4.6	2.3	
MDFN5.5-250(8)	12-10(4-6)	6.35	24.3	6.3	3.4	

旗形端头（尼龙）
FLAG SHAPE TERMINAL



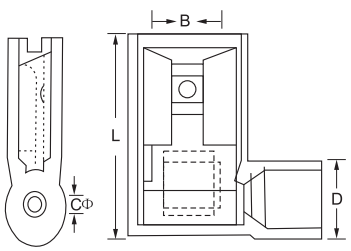


绝缘材料：绝缘　尼龙PVC
绝缘颜色
12-10 A.W.G:黄色　22-16A.W.G:红色　16-14 A.W.G:蓝色
端子材料：紫铜
INSULATION COLOR:VINYL
12-10 A.W.G:YELLOW 22-16A.W.G:RED 16-14 A.W.G:BLUE
TERMINAL MATERIAL:COPPER

项　目 ITEM NO.	适用线材 AWG Applicable Wire AWG	尺寸 DIMENSION				包装
		B±0.3	L±0.5	ΦD±0.3	C±0.3	
FLDNY1.25-250(8)	18-16(0.75-1.5)	6.6	16.3	4.25	1.7	500PCS
FLDNY2-250(8)	16-14(1.5-2.5)	6.6	16.3	4.6	2.3	
FLDNY5.5-250(8)	12-10(4-6)	7.0	23.0	6.3	3.4	

子弹形公预绝缘端头（尼龙）
BULLET SHAPE MALE PRE-INSULATION TERMINAL







绝缘材料：绝缘　尼龙PVC
绝缘颜色
22-16 A.W.G:红色　16-14A.W.G:蓝色　12-10 A.W.G:黄色
端子材料：黄铜
22-16 A.W.G:C=1.7mm　16-14A.W.G:C=2.3mm　12-10A.W.G:C=3.4mm
INSULATON MATERIAL:VINYL　TERMINAL AMTERIAL:BRASS
INSULATION COLOR:
22-16 A.W.G:RED　16-14A.W.G:BLUE　12-10 A.W.G:YELLOW
TERMINAL MATERIAL:COPPER
22-16 A.W.G:C=1.7mm　16-14A.W.G:C=2.3mm　12-10A.W.G:C=3.4mm

项　目 ITEM NO.	适用线材 AWG Applicable Wire AWG	尺寸 DIMENSION				颜色	包装
		B±0.3	L±0.5	D±0.3	C±0.3		
MRFNY0.5-0.75	22-18(0.5-0.75)	2.0	27.0	3.8	1.3	□白色	1000PCS
MRFNY1.25-156	18-16(0.75-1.5)	4.0	25.0	4.2	1.8	红色	500PCS
MRFNY2-156	16-14(1.5-2.5)	4.0	25.0	4.9	2.3	蓝色	
MRFNY5.5-195	12-10(4-6)	5.0	28.0	6.3	3.4	黄色	

子弹形母全绝缘端头（尼龙）
BULLET SHAPE FEMALE FULL INSULATION TERMINAL






绝缘材料：绝缘　尼龙PVC　　端子材料：黄铜
绝缘颜色
22-16 A.W.G:红色　16-14A.W.G:蓝色　12-10 A.W.G:黄色
端子管标识符:
22-16 A.W.G:C=1.7mm　16-14A.W.G:C=2.3mm　12-10A.W.G:C=3.4mm
INSULATON MATERIAL:VINYL　TERMINAL MATERIAL:BRASS
INSULATION COLOR:
22-16 A.W.G:RED　16-14A.W.G:BLUE　12-10 A.W.G:YELLOW
TERMINAL BARREL I.D:
22-16 A.W.G:C=1.7mm　16-14A.W.G:C=2.3mm　12-10A.W.G:C=3.4mm

项　目 ITEM NO.	适用线材 AWG Applicable Wire AWG	尺寸 DIMENSION				颜色	包装
		B±0.3	B±0.3	D±0.3	C±0.3		
FRFNY0.5-0.75	22-16(0.5-0.75)	1.9	24.0	3.8	1.3	□白色	1000PCS
FRFNY1.25-156	18-16(0.75-1.5)	3.9	25.0	4.2	1.8	红色	500PCS
FRFNY2-156	16-14(1.5-2.5)	3.9	25.0	4.9	2.3	蓝色	
FRFNY5.5-195	12-10(4-6)	4.9	27.0	6.3	3.4	黄色	

长形全绝缘中间接头（热缩）
PIN COLD TERMINAL






材料：无缝管（PVC）
MATERIAL: SEAMLESS TUBE (PVC)

项　目 ITEM NO.	适用线材 AWG(mm^2) Applicable Wire AWG(mm^2)	ΦD±0.3	d±0.3	L±0.5	包装
BHT 0.5	22-18(0.5-0.75)	3.0	2.6	25.0	500PCS
BHT 1.25	18-16(0.75-1.5)	4.75	3.2	37.0	
BHT 2	16-14(1.5-2.5)	5.6	3.7	37.0	
BHT 5.5	12-10(4-6)	6.9	5.3	42.0	200PCS

圆形预绝缘端头（热缩）
ROURD SHAPE NAKED TERMINAL

绝缘材料：绝缘　热缩
绝缘颜色
22-16 A.W.G:红色　　16-14 A.W.G:蓝色
端子材料：紫铜
INSULATON MATERIAL:VINYL
INSULATION COLOR
22-16 A.W.G:RED　16-14 A.W.G:BLUE
TERMINAL MATERIAL:COPPER



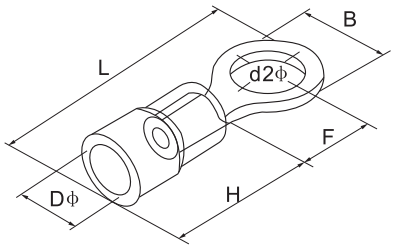


项　目 ITEM NO.	尺寸 DIMENSION				颜色	压接工具	包装
	Φ±0.3	B±0.3	L±1.0	T±0.03			
RHB1.25-3.2	3.2	5.5	28.0	0.75			500PCS
RHB1.25-4	4.2	6.6	28.0				
RHBM1.25-4	4.2	8.0	29.0				
RHB1.25-5	5.2	8.0	30.0				
RHB1.25-6	6.2	11.6	37.0				
RHB1.25-8	8.2	11.6	37.0				
RHB1.25-10	10.2	13.6	40.0				
RHB1.25-12	12.2	19.2	45.0				
RHB2-3.2	3.2	6.6	28.0	0.8			
RHB2-3.5	3.7	6.6	28.0				
RHB2-4	4.2	6.6	28.0				
RHBM2-4	4.2	8.5	31.0				
RHB2-5	5.2	8.5	31.0				
RHBM2-5	5.2	9.5	31.0				
RHB2-6	6.2	12.0	36.0				
RHB2-8	8.2	12.0	36.0				
RHB2-10	10.2	13.6	40.0				
RHB2-12	12.2	19.2	45.0				
RHB5.5-4	4.2	9.5	34.0	1.0			
RHB5.5-5	5.2	9.5	34.0				
RHB5.5-6	6.2	12.0	37.0				
RHB5.5-8	8.2	15.0	41.0				
RHB5.5-10	10.2	15.0	41.0				
RHB5.5-12	12.2	19.2	45.0				



叉形预绝缘端头（热缩）
FORK SHAPE PREINSULATION TERMINAL

绝缘材料：绝缘　热缩
绝缘颜色
22-16 A.W.G:红色　16-14 A.W.G:蓝色
14-12A.W.G:黑色　12-10 A.W.G:黄色
端子材料：紫铜
INSULATON MATERIAL:VINYL
INSULATION COLOR
22-16 A.W.G:RED　16-14 A.W.G:BLUE
14-12A.W.G:BLACK　12-10 A.W.G:YELLOW
TERMINAL MATERIAL:COPPER



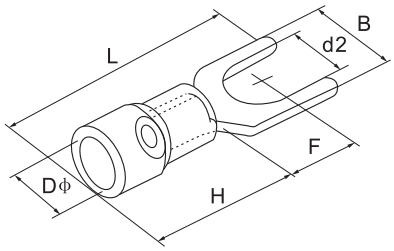


项　目 ITEM NO.	尺寸 DIMENSION				颜色	压接工具	包装
	Φ±0.3	B±0.3	L±1.0	T±0.03			
SHB1.25-3.2	3.2	5.7	30.0	0.75			500PCS
SHB1.25-3.5	3.7	5.7	30.0				
SHB1.25-4	4.2	6.4	30.0				
SHBM1.25-4	4.2	7.2	30.0				
SHB1.25-5	5.2	8.1	30.0				
SHB1.25-6	6.2	9.5	30.0				
SHB2-3.2	3.2	5.7	30.0	0.8			
SHB2-3.5	3.7	5.7	30.0				
SHB2-4	4.2	6.4	30.0				
SHBM2-4	4.2	7.2	30.0				
SHB2-5	5.2	8.1	30.0				
SHB2-6	6.2	9.3	30.0				
SHB5.5-4	4.2	9.0	33.0	1.0			
SHB5.5-5	5.2	9.0	33.0				
SHBS5.5-6	6.2	9.0	33.0				
SHBL5.5-6	6.2	12.0	39.0				
SHB5.5-8	8.2	14.0	38.0				



旋上式线螺母接头（内置弹簧 的翅膀式）
SCREW-ON WIRE NUT CONNECORS (WING TYPE WITH SPRING INSERT)






内插弹簧
WITH SPRING INSERT

项 目 ITEM NO.	适合的线号及AWG SUTABLE WIRE NO.& A.W.G	尺寸 DIMENSION 英寸 inch mm						颜 色 COLOR
		A		B		C		
WN1	MIN #20×1+#22×1 MAX #16×2	.598	15.2	.339	8.6	.264	6.7	灰 橙 红 GREY ORANGE RED
WN2	MIN #20×3 MAX #16×3	.693	17.6	.386	9.8	.291	7.4	蓝 橙 黑 BLUE ORANGE BLACK
WN3	MIN #20×3 MAX #16×3+#18×1	.866	22.0	.472	12.0	.390	9.9	橙 黄 黑 ORANGE YELLOW BLACK
WN4	MIN #14×1+#18×1 MAX #14×4+#18×1	.965	24.5	.551	14.0	.433	11.0	黄 灰 橙色红 YELLOW GREY ORANGE RED
WN6	MIN #14×2 MAX #10×2+#12×2	1.079	27.4	.661	16.8	.500	12.7	红 RED
WN8	MIN #12×3 MAX #10×4	1.286	32.2	.720	18.3	.504	12.8	灰 GREY

冷压端子护套
COLD PRESS TERMINAL SHEATH





塑料PVC阻燃
PLASTIC PVC FLAME-RESTANTCY

型号 ITEMNO	尺寸 DIMENSION				
	D1	D2	D3	L	T
	mm	mm	mm	mm	mm
V-1.25(1.5)	2.8	3.3	3.1	13±2.0	$0.6^{+0.3}_{-0.2}$
V-2(2.5)	3.3	4.5	3.7	14	0.7
V-3.5(4)	4.2	5.7	4.1	17	0.8
V-5.5(6)	4.8	6.3	5.2	17	0.8
V-8(10)	6.2	7.2	6.2	19	1.0
V-14(16)	7.5	10	8	25±2.4	1.1±0.2
V-22(25)	10.5	12	9.5	30	1.2
V-38(35)	12.5	14	11.8	34	1.5
V-60(50)	15	16.8	13.5	39	1.5
V-80(70)	17	19	16	47±3.0	1.6±0.4
V-100(95)	19	22	18	54	1.7
V-125(120)	21	24	20	57	1.8
V-150	23	24.5	22	65	2.0
V-180(185)	27	32	24	65	2.0
V-250(240)	29	38	26.5	77±4.0	2.5±0.6
V-325(300)	29	38	29	77	2.5
V-400	39	44	37	86	2.5
V-500	40.5	45	39.5	86	2.5
V-630	47	52	45	92	2.5














OT 铜开口接线鼻
OT COPPER OPERN CONNECTING NOSE/GT-1


用途
适用于配电装置中导线连接。

Application
Suitable for the connection of copper conductors in distribution equipment.

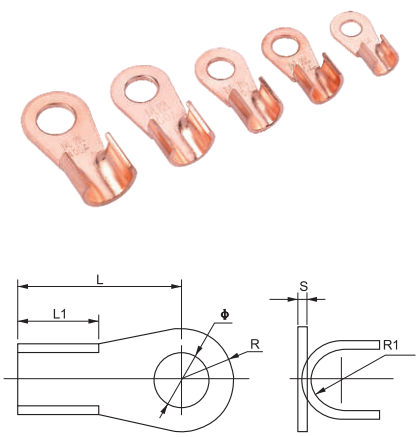

规格型号 Model & Spec	主要尺寸 Dimension(mm)					
	L	L1	S	R	R1	Φ
OT-3A	11.5	5	0.5	3.5	1.3	4.2
OT-5A	12.5	5.4	0.6	4.2	1.75	5.2
OT-10A	15	6	0.8	4.7	2	5.2
OT-20A	17	7.4	1	5.5	2.5	6.2
OT-30A	18	8.2	1.1	5.8	3.2	6.2
OT-40A	20	9	1.1	6.1	3.5	6.2
OT-50A	21.5	9	1.2	6.3	3.7	6.2
OT-60A	23	10.5	1.3	7.2	4	8.2
OT-80A	25.5	11	1.4	8	4.5	8.2
OT-100A	29	12	1.5	8.5	5	8.2
OT-150A	31	12.4	1.6	9	5.5	10.4
OT-200A	33	14	1.7	10	6	10.4
OT-250A	36	15.5	1.8	10.5	6.5	10.4
OT-300A	40	17	2	11.5	7	12.4
OT-400A	43	18	2.2	13	8	14.4
OT-500A	46	20	2.4	14.5	8.5	14.4
OT-600A	50.5	23	2.7	16	10.5	16.5
OT-800A	60	30	3.2	17.5	12.5	18.5
OT-1000A	66	33	3.6	20.5	15.5	18.5

DTL 系列铜铝接线端子
DTL COPPER-ALUMINIUM CONNECTING TERMINALS

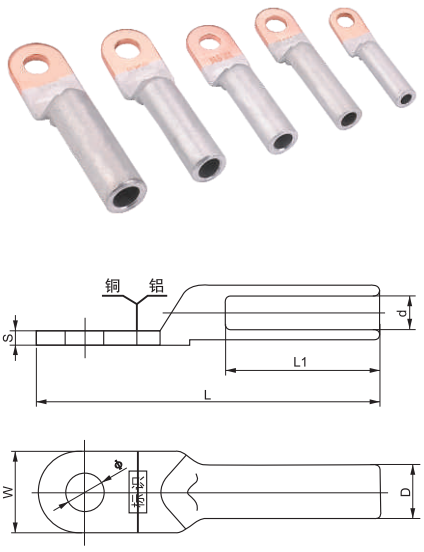

规格型号 Model & Spec	主要尺寸 Dimension(mm)						
	Φ	D	d	L	L1	W	S
DTL-10	8.8	10	5.2	65	32	16	2.5
DTL-16	8.8	11	6.1	70	34	16	2.6
DTL-25	8.8	12	7.1	75	37	18	3.2
DTL-35	10.8	14	8.5	85	41	20	3.6
DTL-50	10.8	16	9.8	90	43	23	4.0
DTL-70	13	18	11.5	102	50	26	4.6
DTL-95	13	21	13.5	112	54	28	4.8
DTL-120	14.8/	23	15	120	56	30	5.3
DTL-150	14.8	25	17	126	58	34	5.8
DTL-185	17	27	18.6	133	60	37	6.5
DTL-240	17	30	21.5	140	63	40	7.0
DTL-300	21	34	24	158	70	45	8.5
DTL-400	21	38	27	175	75	52	9.5
DTL-500	21	45	30	190	80	60	10.0
DTL-630	-	50	34.2	225	90	78	11.0


用途

接线端子适用于配电装置中电线、电力电缆与电器设备的连接。DL系列铝接线端子采用1060铝棒料压制、DT系列铜接线端子采用(T2)铜棒压制。

Application


Connecting terminals are suitable for the conjuncton of wires, cablese in the distribution equripment and the electrical equipment. DL series of aluminum connecting terminals are pressed with aluminium bar(L3), DT series of copper connecting terminals with copper bar(T2).

DT 系列铜接线端子（堵油型）
DT COPPER CONNECTING TERMINALS

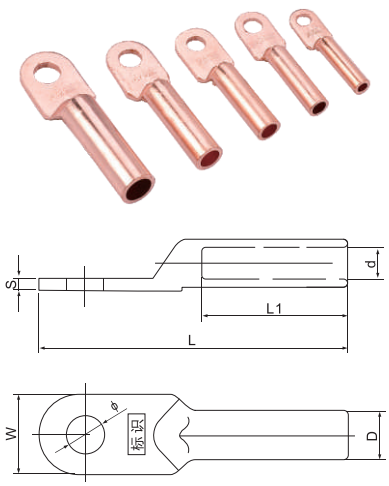

规格型号 Model & Spec	主要尺寸 Dimension(mm)						
	Φ	D	d	L	L1	W	S
DT-10	8.5	9	5.2	62	26	16	2.5
DT-16	8.5	10	6.1	68	30	16	2.5
DT-25	8.5	11	7.1	70	33	18	2.7
DT-35	10.5	12	8.5	80	36	20.5	3.0
DT-50	10.5	14	9.8	86	38	23	3.4
DT-70	12.5	16	11.5	95	43	26	3.8
DT-95	12.5	18	13.5	104	46	28	4.2
DT-120	14.5	20	15	112	49	30	4.7
DT-150	14.5	22	17	120	51	34	5.5
DT-185	16.5	25	18.6	126	55	37	5.8
DT-240	16.5	27	21.5	137	60	40	6.5
DT-300	21	31	24	158	68	50	8.0
DT-400	21	34	27	175	78	50	9.0
DT-500	21	38	30	186	82	60	10.0
DT-630	21	45	34.2	215	86	80	12.0

DT 系列铝接线端子（堵油型）
DT ALUMINIUM CONNECTING TERMINALS

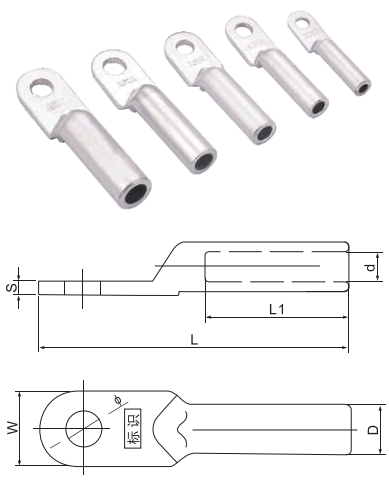


规格型号 Model & Spec	主要尺寸 Dimension(mm)						
	Φ	D	d	L	L1	W	S
DL-10	8.8	10	5.2	65	32	16	2.5
DL-16	8.8	11	6.1	70	34	16	3.0
DL-25	8.8	12	7.1	75	37	18	3.2
DL-35	10.8	14	8.5	85	41	20	3.6
DL-50	10.8	16	9.8	90	43	23	4.0
DL-70	13	18	11.5	102	50	26	4.5
DL-95	13	21	13.5	112	54	28	5.0
DL-120	14.8	23	15	120	56	30	5.5
DL-150	14.8	25	17	126	58	34	6.0
DL-185	17	27	18.6	133	60	37	6.5
DL-240	17	30	21.5	140	63	40	7.0
DL-300	21	34	24	158	70	45	9.0
DL-400	21	38	27	175	75	52	10.0
DL-500	21	45	30	190	80	60	11.0
DL-630	21	50	34.2	225	90	78	12.0

JG 铜接线端头
JG COPPER CONNECTION TERMINAL

用途 Application:
适用于配电装置中电线、电力电缆与电气设备的连接、采用紫铜管料压制，表面镀锡。


型号Type	ϕ	D	d	L
JG-10	6.2	8	5	38
JG-16	8.4	9	6	41
JG-25	8.4	10	7	46
JG-35	8.5	11	8	52
JG-50	8.5	13	10	54
JG-70	10.5	16	12	61
JG-95	10.5	18	14	66
JG-120	12.5	20	15	73
JG-150	12.5	23	17	77
JG-185	14.5	25	19	86
JG-240	16.5	27	21	93
JG-300	16.5	31	24	103
JG-400	18.5	34	26	113
JG-500	20.5	38	30	124
JG-630	22.5	45	35	140
JG-800	22.5	50	40	170

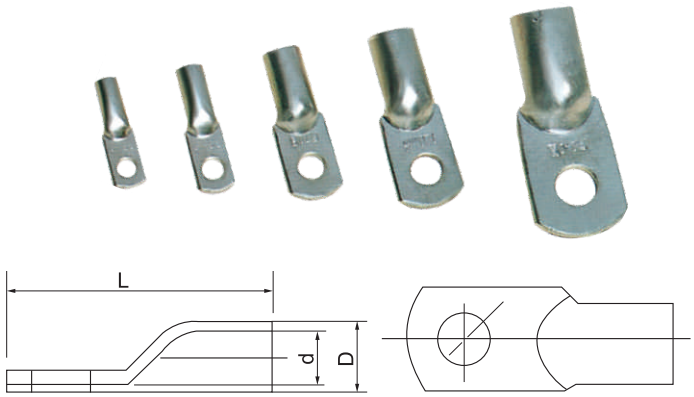

SC(JGK) SC(JGA) 引进铜接线端头
SC(JGK) SC(JGA) IMPORT COPPER TERMINAL


用途 Application:
适用于标称截面1.5-1000mm²电力电缆式电线的铜导体与电气设备的连接，采用紫铜管料压制，表面镀锡。

型号Type	ϕ	D	d	L
SC(JGK)-1.5	ϕf4.2,f5.2	3.5	1.8	18
SC(JGK)-2.5	ϕf4.2,f5.2,f6.2	4	2.5	19
SC(JGK)-4	ϕf5.2,f6.2	4.8	3.1	21
SC(JGK)-6	ϕf5.2,f6.2,f8.2	5.5	3.8	24
SC(JGK)-10	ϕf6.2,f8.2	6.8	4.8	25.5
SC(JGK)-16	ϕf6.2,f8.2,f10.5	7.5	5.5	30.5
SC(JGK)-25	ϕf6.2,f8.2,f10.5	9	7	34
SC(JGK)-35	ϕf6.2,f8.2,f10.5,f12.5	10.5	8.2	38
SC(JGK)-50	ϕf8.2,f10.5,f12.5	121.5	9.8	45
SC(JGK)-70	ϕf8.2,f10.5,f12.5	14.5	11.5	50
SC(JGK)-95	ϕf10.5,f12.5	17.5	13.8	55.5
SC(JGK)-120	ϕf12.5,f16.5	19.5	15.5	63
SC(JGK)-150	ϕf12.5,f16.5	21	16.5	71
SC(JGK)-185	ϕf16.5	23.5	18.8	78
SC(JGK)-240	ϕf16.5	26.5	21	92
SC(JGK)-300	ϕf16.5,f20.5	30	24	102
SC(JGK)-400	ϕf16.5,f20.5	34	26.5	113
SC(JGK)-500	ϕf16.5,f20.5	38	30	123
SC(JGK)-630	ϕf20.5,f22.5	45	35	135
SC(JGK)-800	ϕf20.5,f22.5	50	39	170
SC(JGK)-1000	ϕf20.5,f22.5	56	44	200

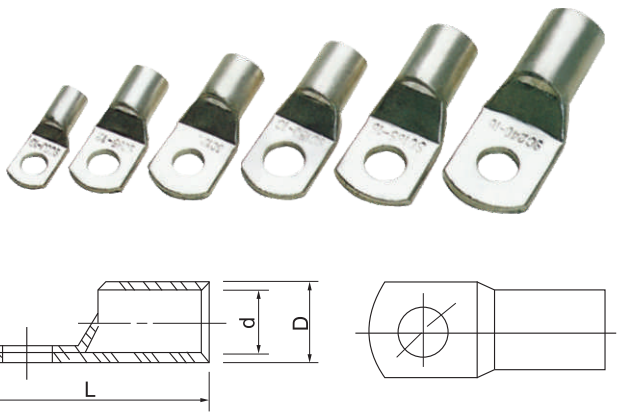

引进C45插针，材料紫铜管，表面镀锡。

型号Type	D	d	L	L1
10^2	7.5	5	34	13.5
16^2	8.5	6	35	14
25^2	10	7	36	14.5
35^2	11	8	37	15
50^2	13	10	41	15.5
70^2	16	12	45	16
95^2	18	14	50	18
120^2	20	15	57	20
150^2	22	17	67	24
185^2	24	19	77	28
240^2	26	21	85	31

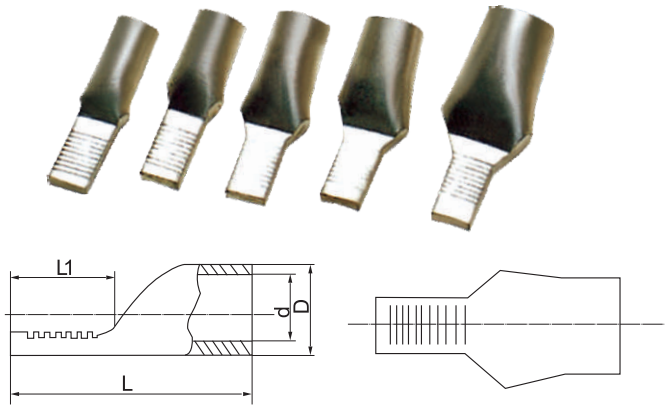




FXT 冷压端子钳 FYT 机械压接钳 FYQ 液压钳
FXT Wire cable plers connection terminal and others



PC 自锁式尼龙扎带
Self-locking nylon cable ties



PC 螺旋式压线帽
Double wings screw on wire connectors

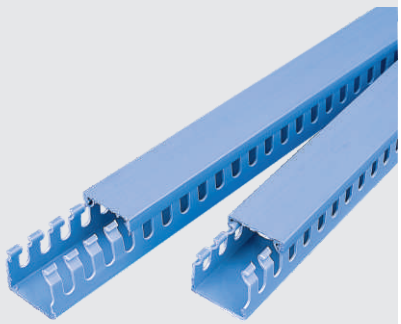

绝缘配线槽
Wirng duct（slotted）



尼龙扎带
Nylon wrap strap

端子类型说明 TERMINAL TYPE INCTRUCTION:

R V S 1 - 3.7


- 螺栓口尺寸 bot mouth dimension
- 导线使用范围(0.5-1.5mm) the usage range of conducting wire
- 小号(头部宽度)small size (head width)
- 带色缘套 terminal end insert cover the insulation case
- 圆形端子 round shape terminal

1表示0.5-1.5mm²(红)
2表示1.5-2.5mm²(蓝)
3表示2.5-4mm²(黑)
5表示4-6mm²(黄)
8表示6-10mm²
14表示10-16mm²
22表示16-25mm²
150表示150-185mm²

1repesent0.5-1.5mm²(Red)
2repesent1.5-2.5mm²(Blue)
3repesent2.5-4mm²(Black)
5repesent4-6mm²(Yellow)
8repesent6-10mm²
14repesent10-16mm²
22repesent16-25mm²
150repesent150-185mm²

S：小号(头部宽度)
M：中号(头部宽度)
L：大号(头部宽度)
Nb：无绝缘套、尾部接缝焊银
D：端子尾部镶铜套再套绝缘套
R：圆形端子
S：叉形端子
Pt：针形端子
V：尾部套绝缘套

S:small size (head width)
M:middle size(head width)
L:large size
NB:end junction without insulation sleet weld with silver
D:terminal end insert copper sleeve,then cover the insulation case
R:round shape terminal
S:fork shape terminal
PT:needle shape terminal
V:eng with insulation case



本手册中图片、技术说明可能与实际有所不同，请以产品实物和使用说明书为准。产品种类繁多，未能一一尽录，详情请向我公司销售部或当地经销商查询。
我公司保留为产品技术进步、升级所作改动的权利，如有改动，恕不另行通知。**版板所有，未经许可，任何单位或个人不得作全部或局部翻印、转载。**
The pictures and technology instruction in this manual may be a little different from the actual one, please regard the real products or operating instruction as standard.
Regard to detail information of the products, please contact with the sales department of our company or the local agent.
Our company reserve the right to make change due to improvement or upgrading of product technology, if has any change, we will not give notice. We own the copyright. Fully or partly reprint or duplication is not permitted if without our authorization.

乐清凤凰线头有限公司
YUEQING PHOENIX TERMINAL CO., LTD.

浙江省乐清市柳市镇　邮编：325604
Liushi Town, Yueqing City, Zhejiang Province　P.C.: 325604
开户：浙江省乐清市建行新虹支行
Bank name: China Construction Bank, Zhejiang Yueqing Branch, Xinhong Sub-branch
帐号Account No.：33001627565052500575

销售部：凤凰冷压端头
Sales Dept.: Phoenix Cold Pressing Terminals
电话Tel：0086-0577-62756035
电话Tel：0086-0577-62756019
传真Fax：0086-0577-62753138
QQ：27445　60228
阿里Alibaba Shop：http://shop1376877530354.1688.com.
地址：浙江省温州市乐清市柳市镇长征路86号
Add.: No.86, Changzheng Road, Liushi Town, Yueqing City, Wenzhou City, Zhejiang Province

销售部：凤凰电力金具
Sales Dept.: Phoenix Electric Power Fittings
电话Tel：0086-0577-61756988
电话Tel：0086-0577-61752665
传真Fax：0086-0577-61751633

销售部：凤凰尼龙扎带
Sales Dept.: Phoenix Cable Ties
电话Tel：0086-0577-61755161
传真Fax：0086-0577-61755162